

TUTORIAL

TITLE

Beach skirt

FROM THE FEATURE

Follow us to the sea - beach outfits

SISTERMAG

N°8

MATERIALS

- » Fabric of your choice, 205 cm

TUTORIAL

The cut is designed for a waist measurement of 68 cm. To adapt to own waist measurement, add the missing cm – divided respectively between the front and back side seams. Cut the waistband accordingly.


It should be noted that both overlap and underlap in the front centre are 2.3 cm wide each, i.e. the waistband must be cut with a 5 cm long and 2 cm wide convenience seam allowance.

An easier way to adjust the width of the skirt is at the front edge. Add the missing cm at the front right and left and move the bug correspondingly.


1. Cut fabric according to pattern
2. Mark pleads
3. Sew front and back side seams (if striped fabric is used, look out for pattern)
4. Lay pleads x on o and stitch
5. Iron down front facing
6. Work waistband and sew to top edge
7. Work buttonholes and sew buttons
8. Trim the hem of the skirt by hand





CONT.

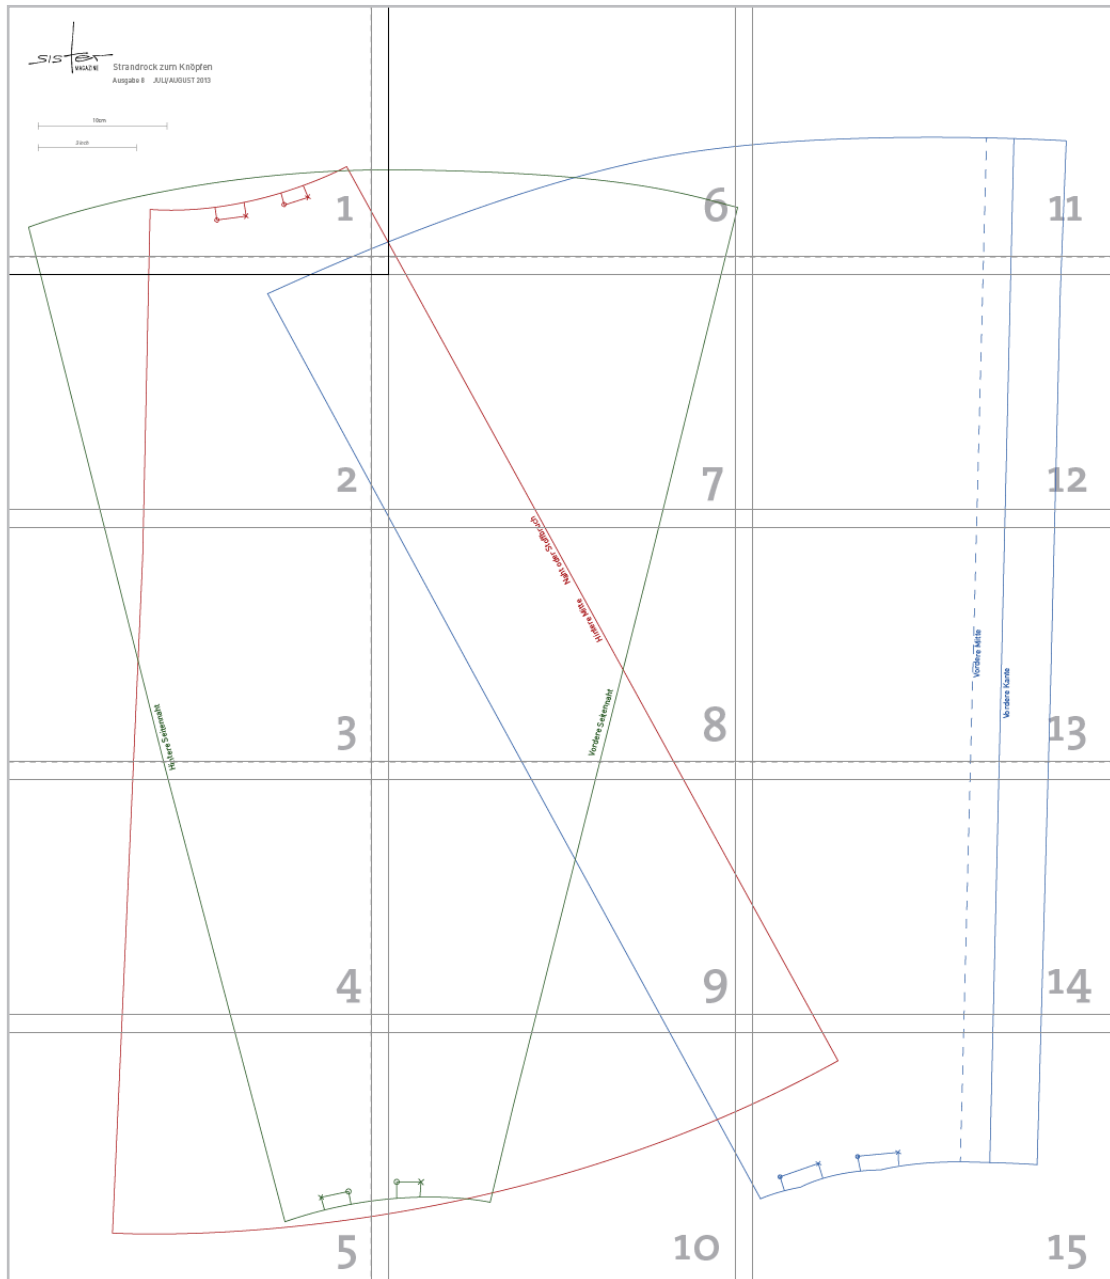


- Front skirt parts (Cut 2x)
- Back skirt part (Cut in fabric fold)
- Side skirt parts (Cut 2x)

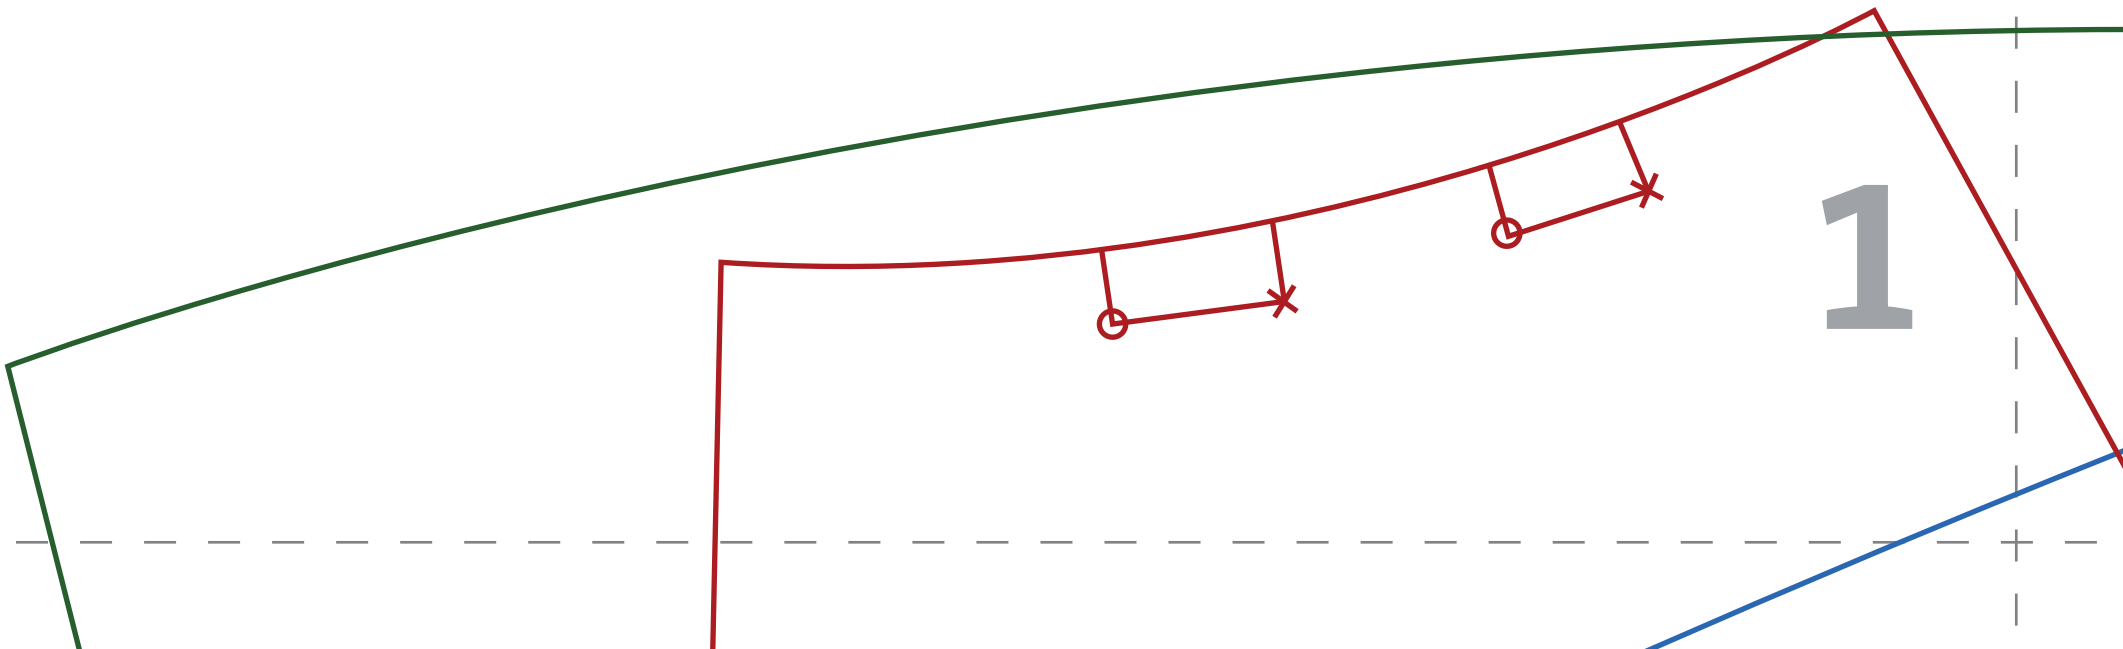

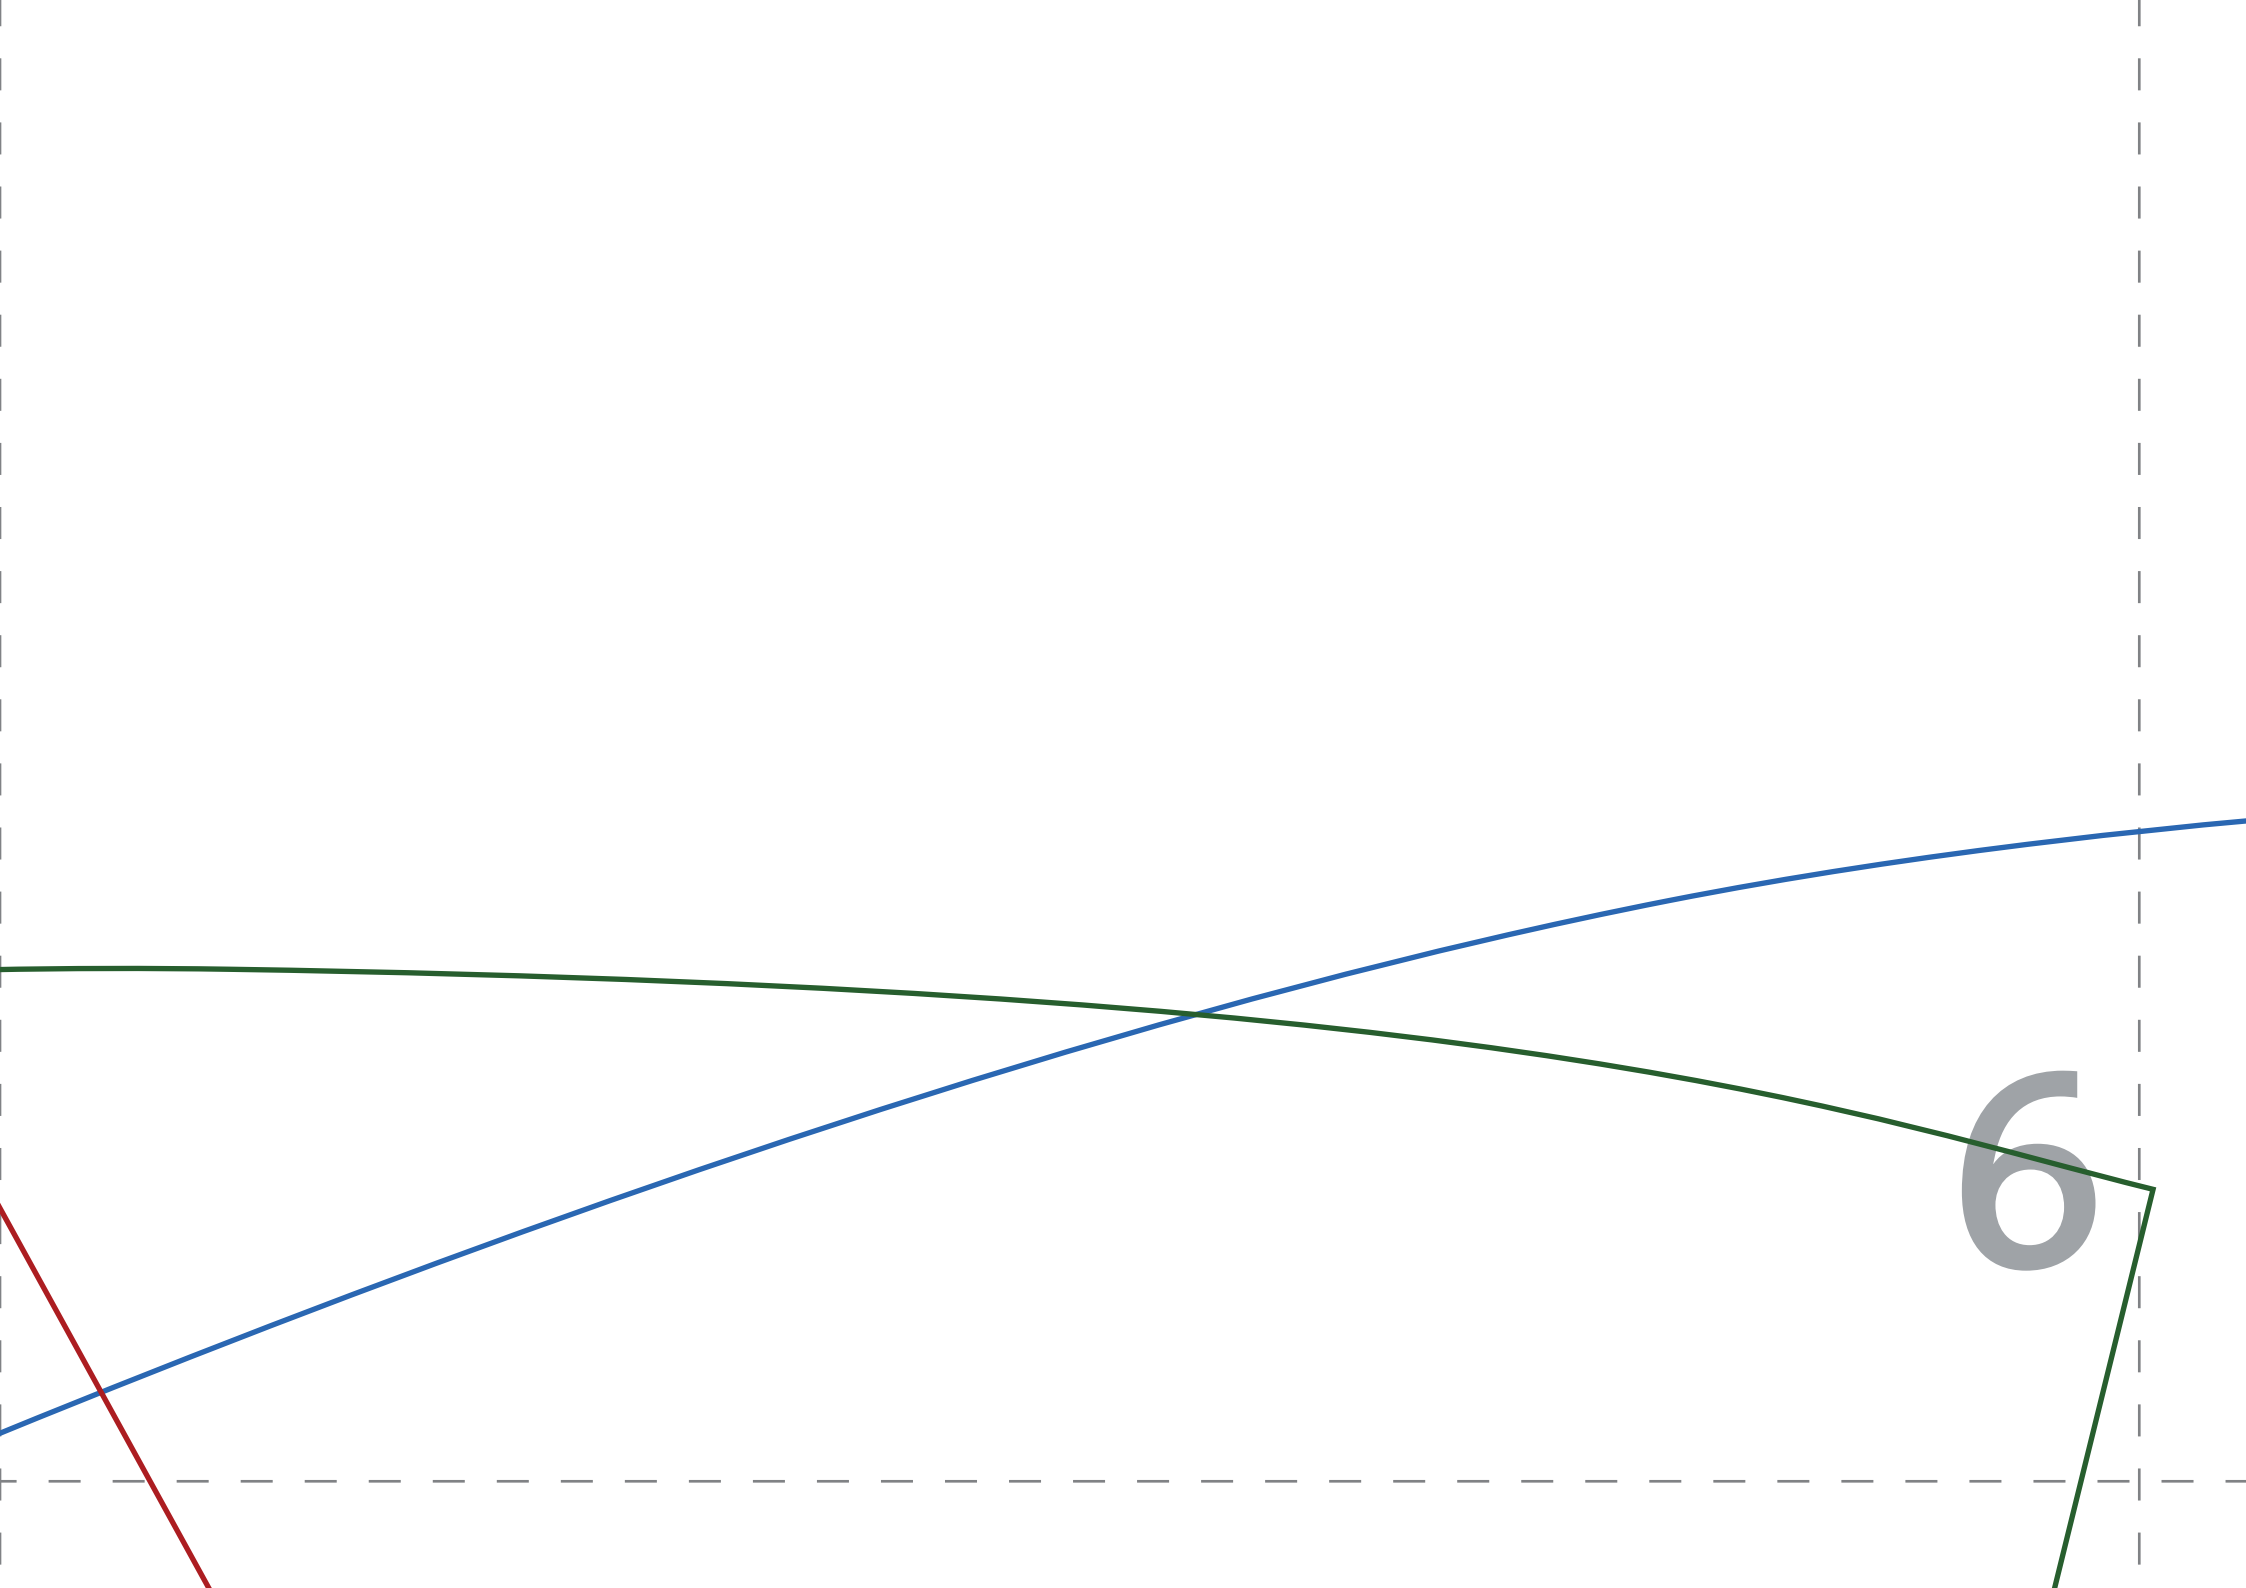

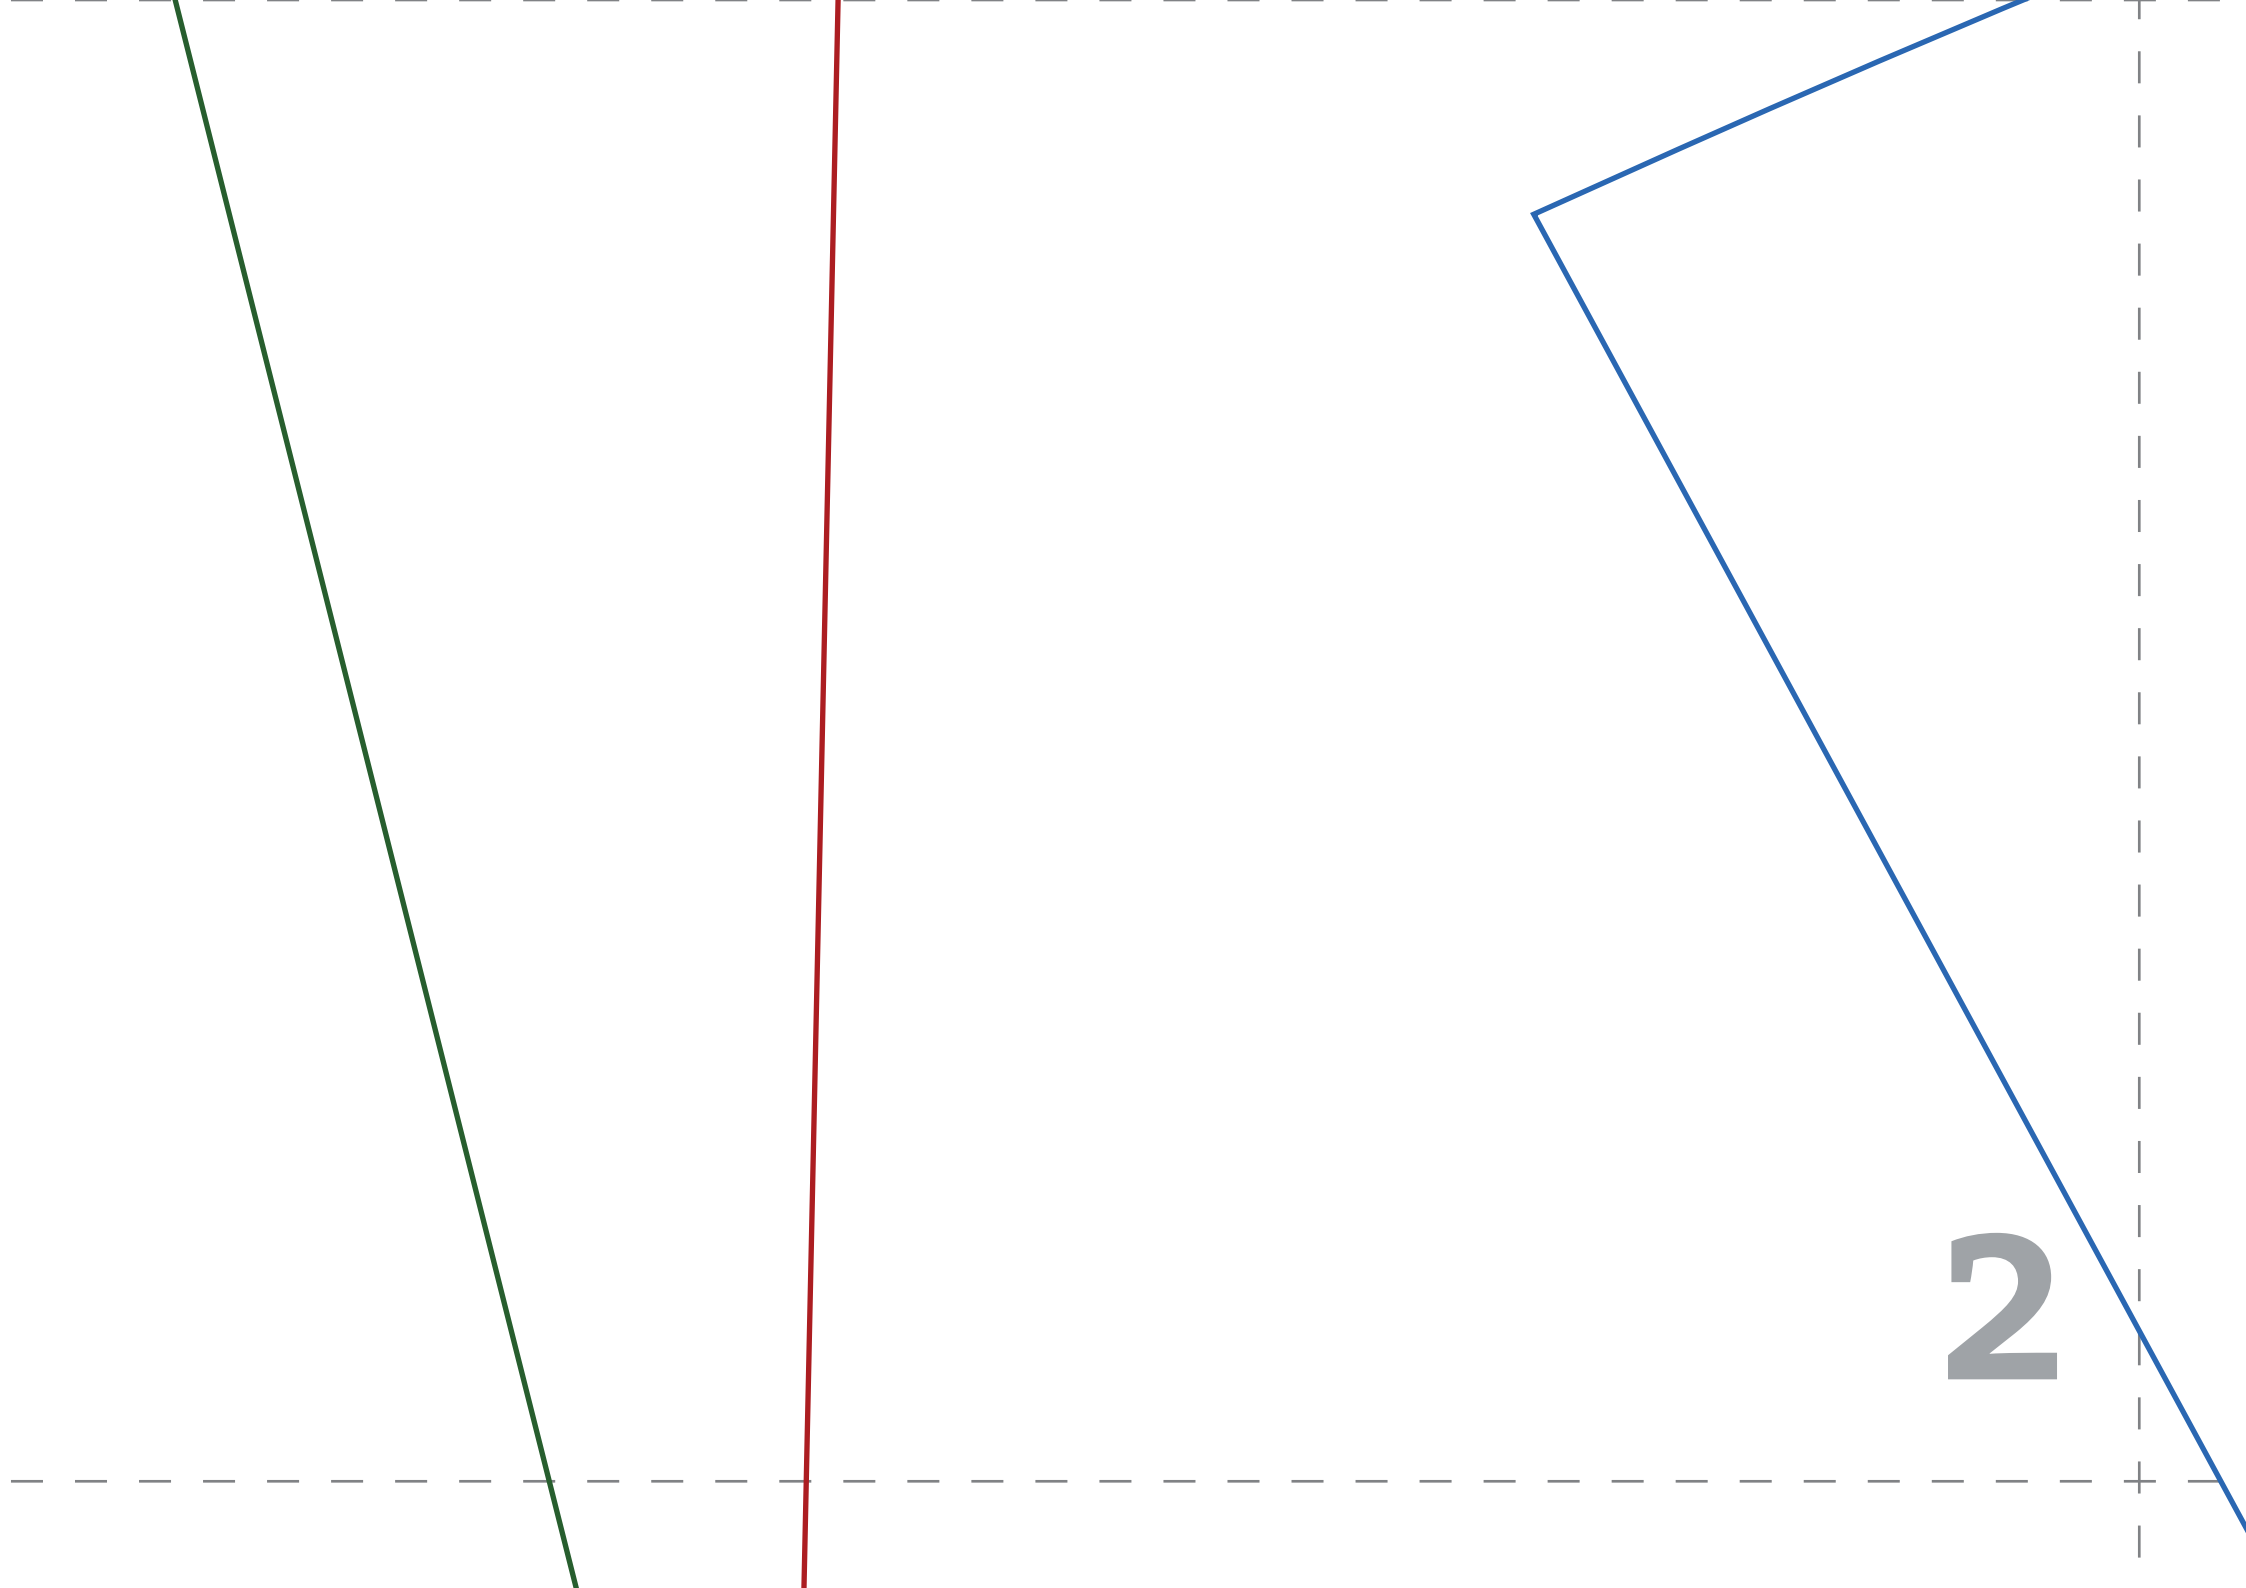

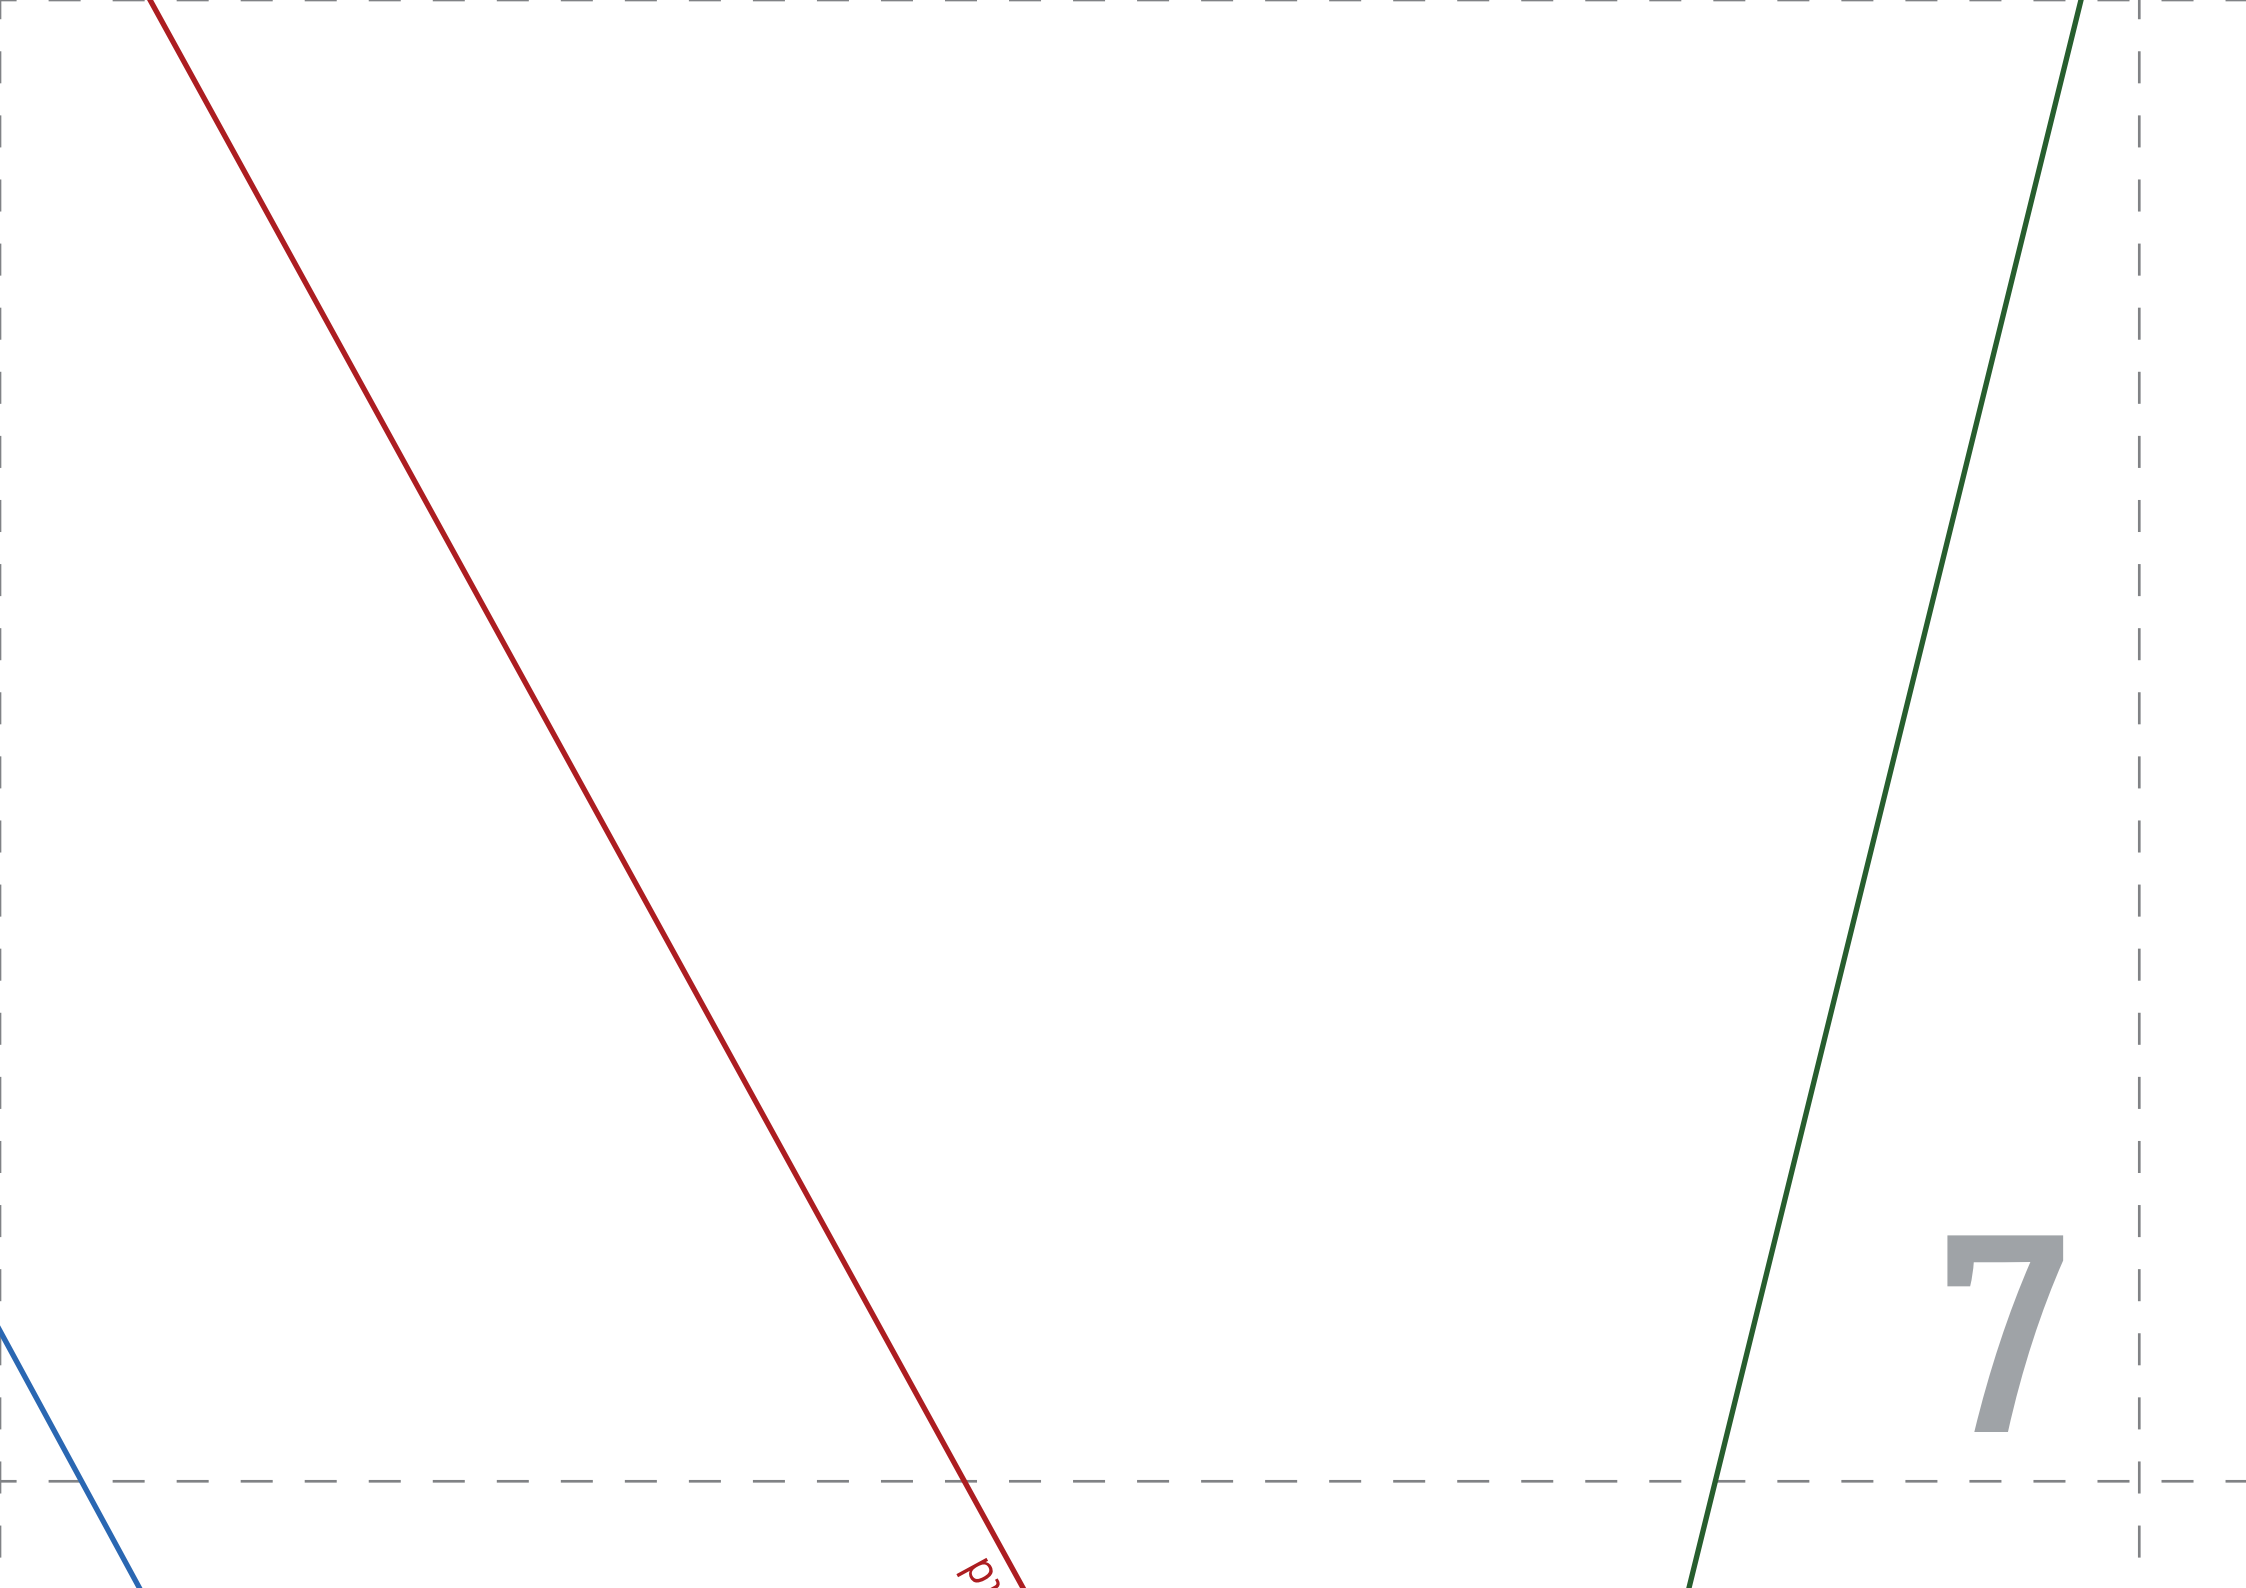


p

7




Back side seam

3

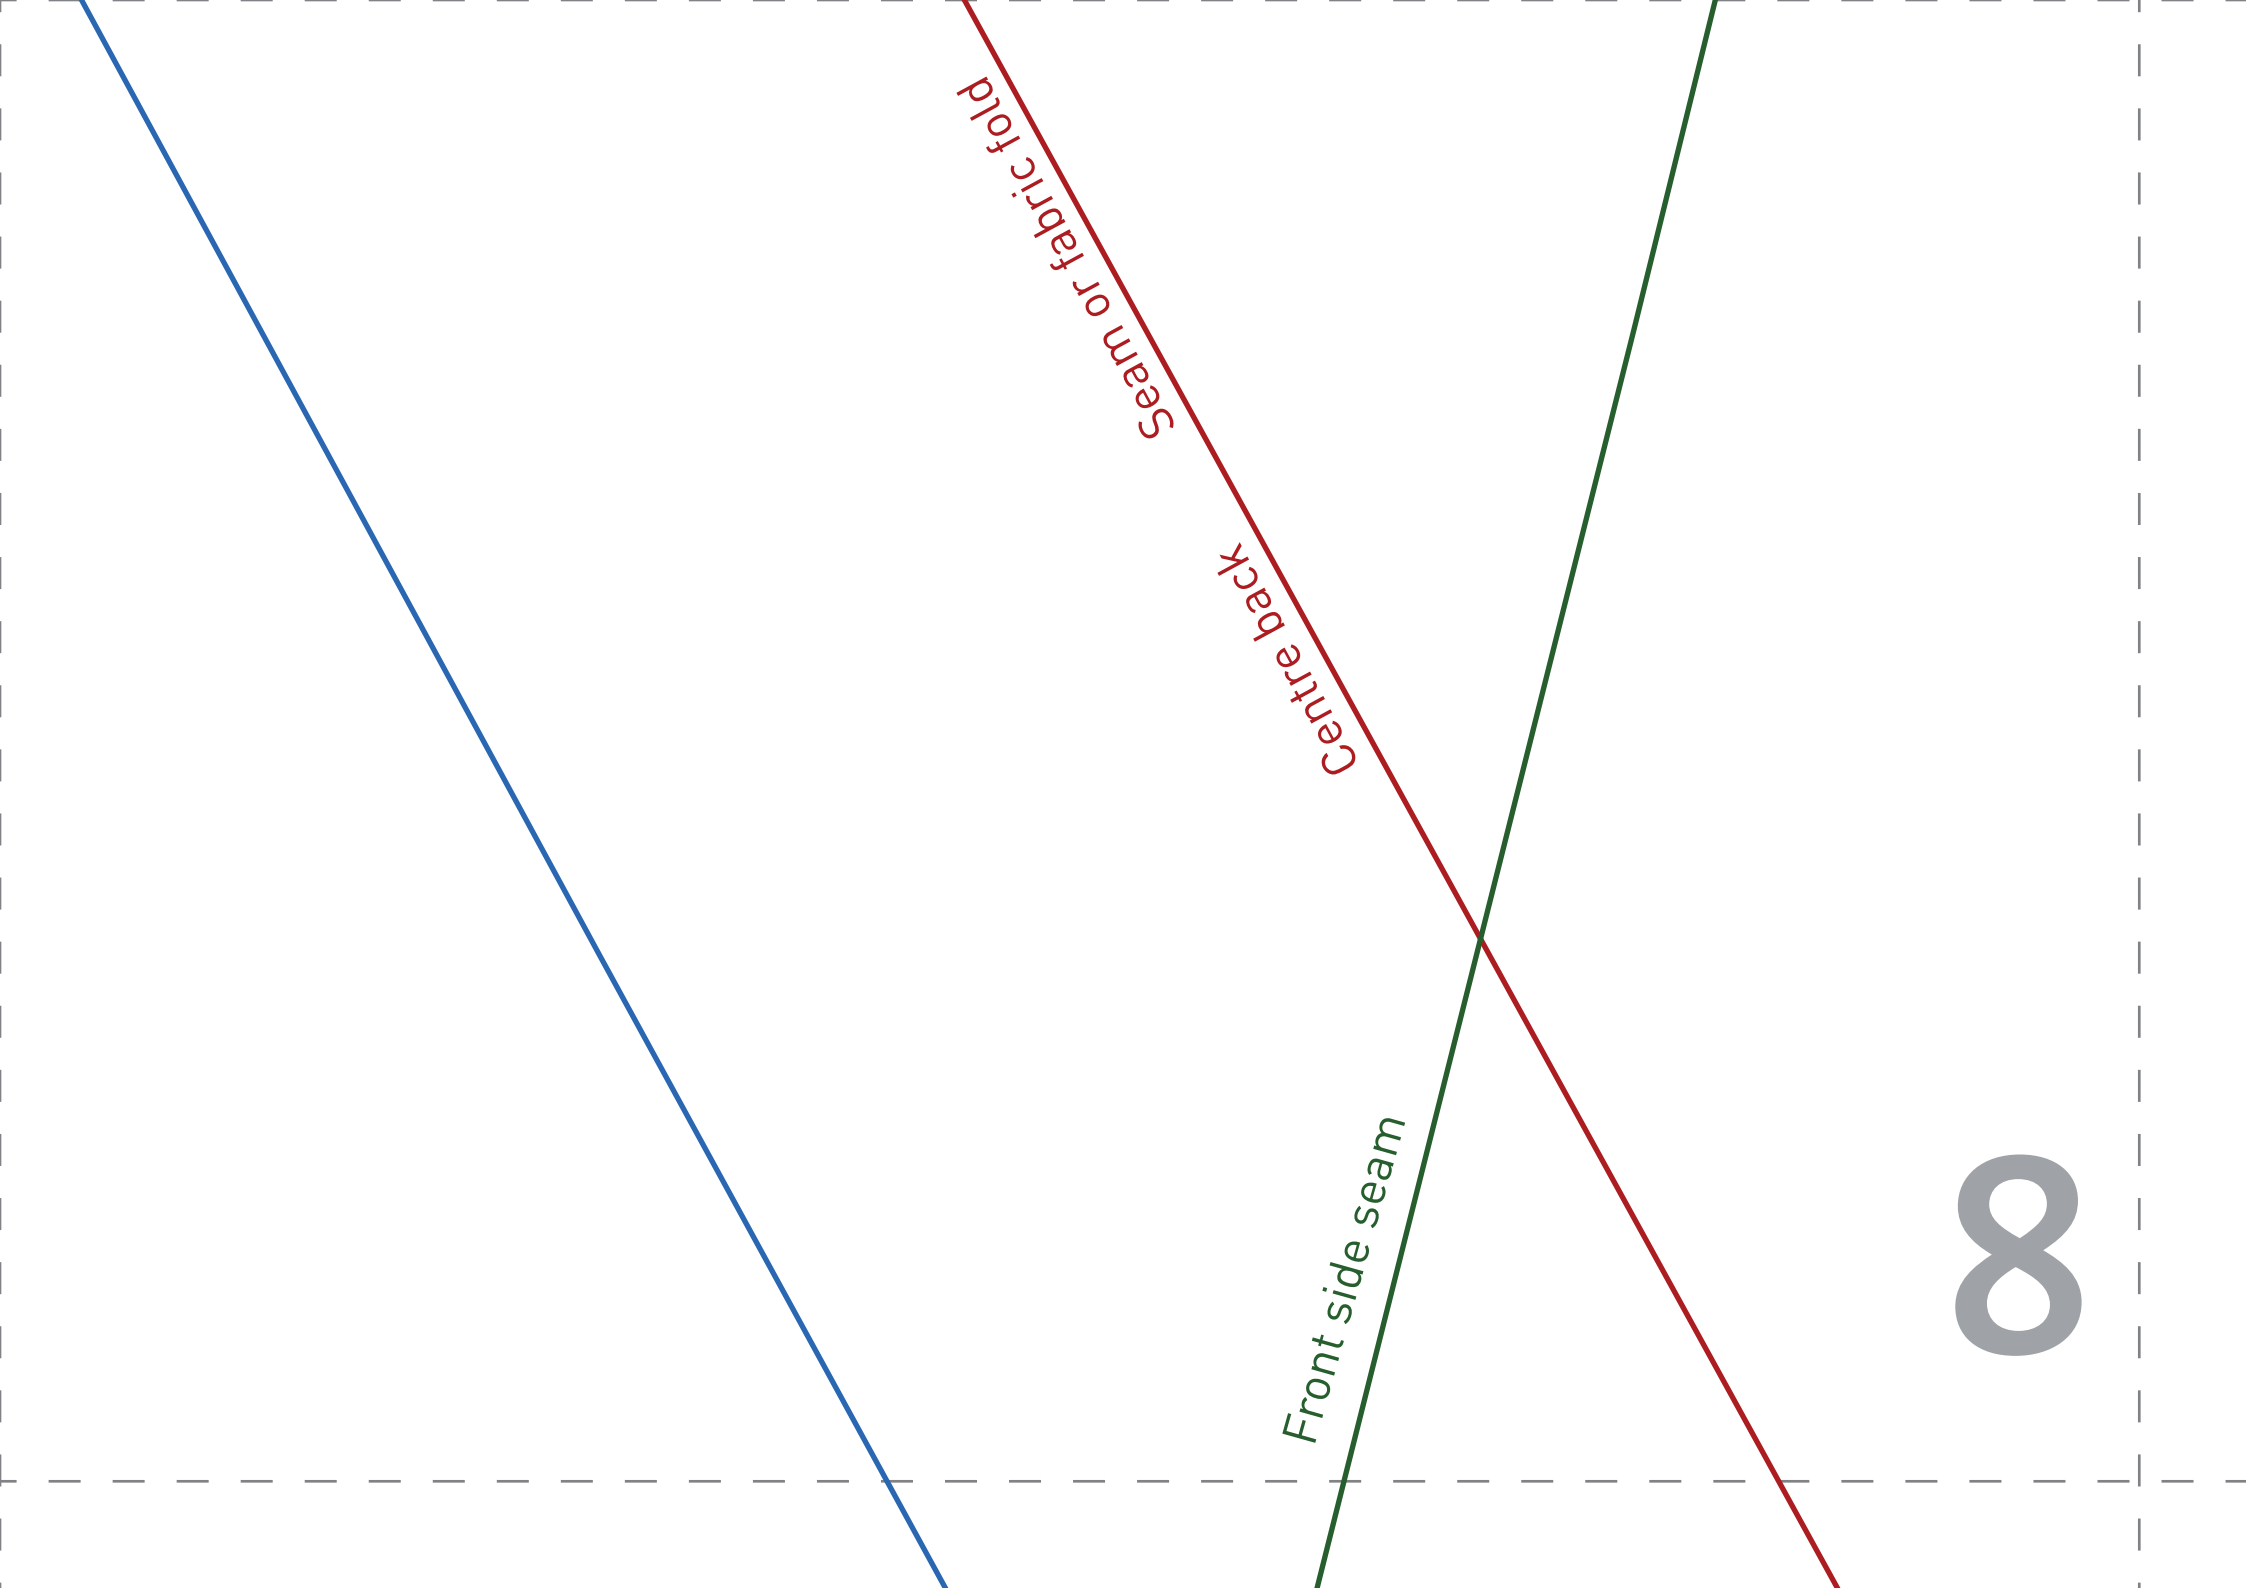


Bas


4

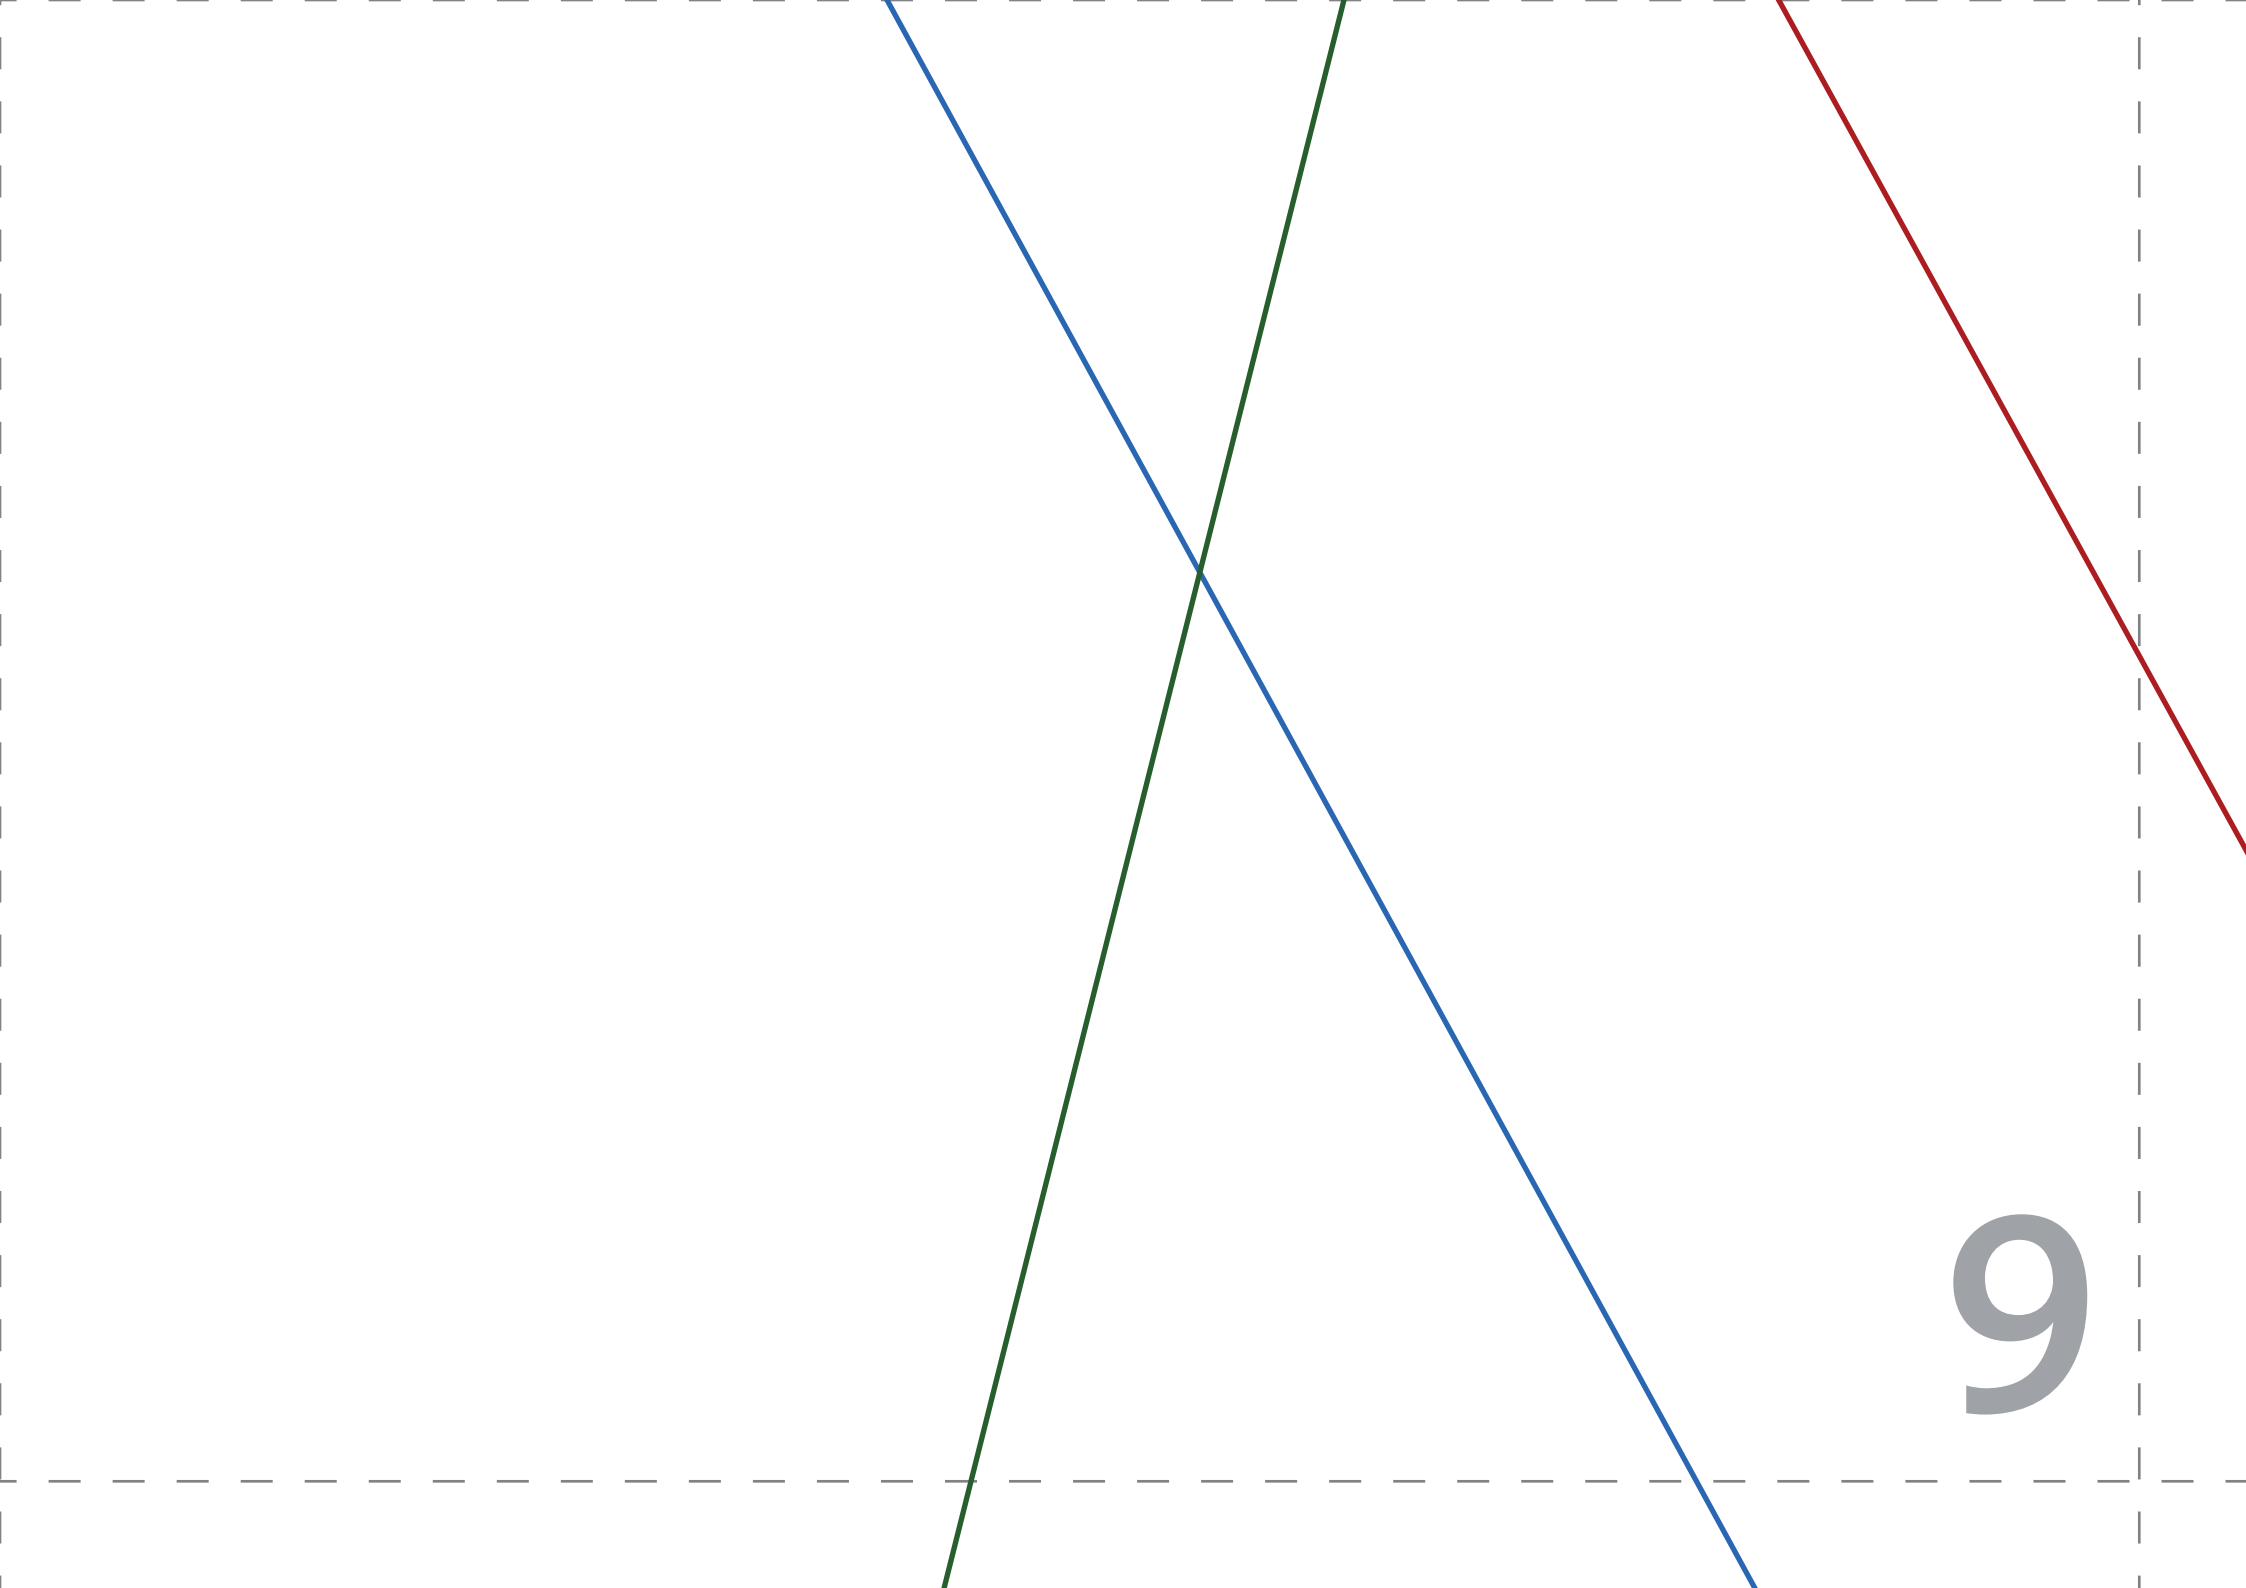


9

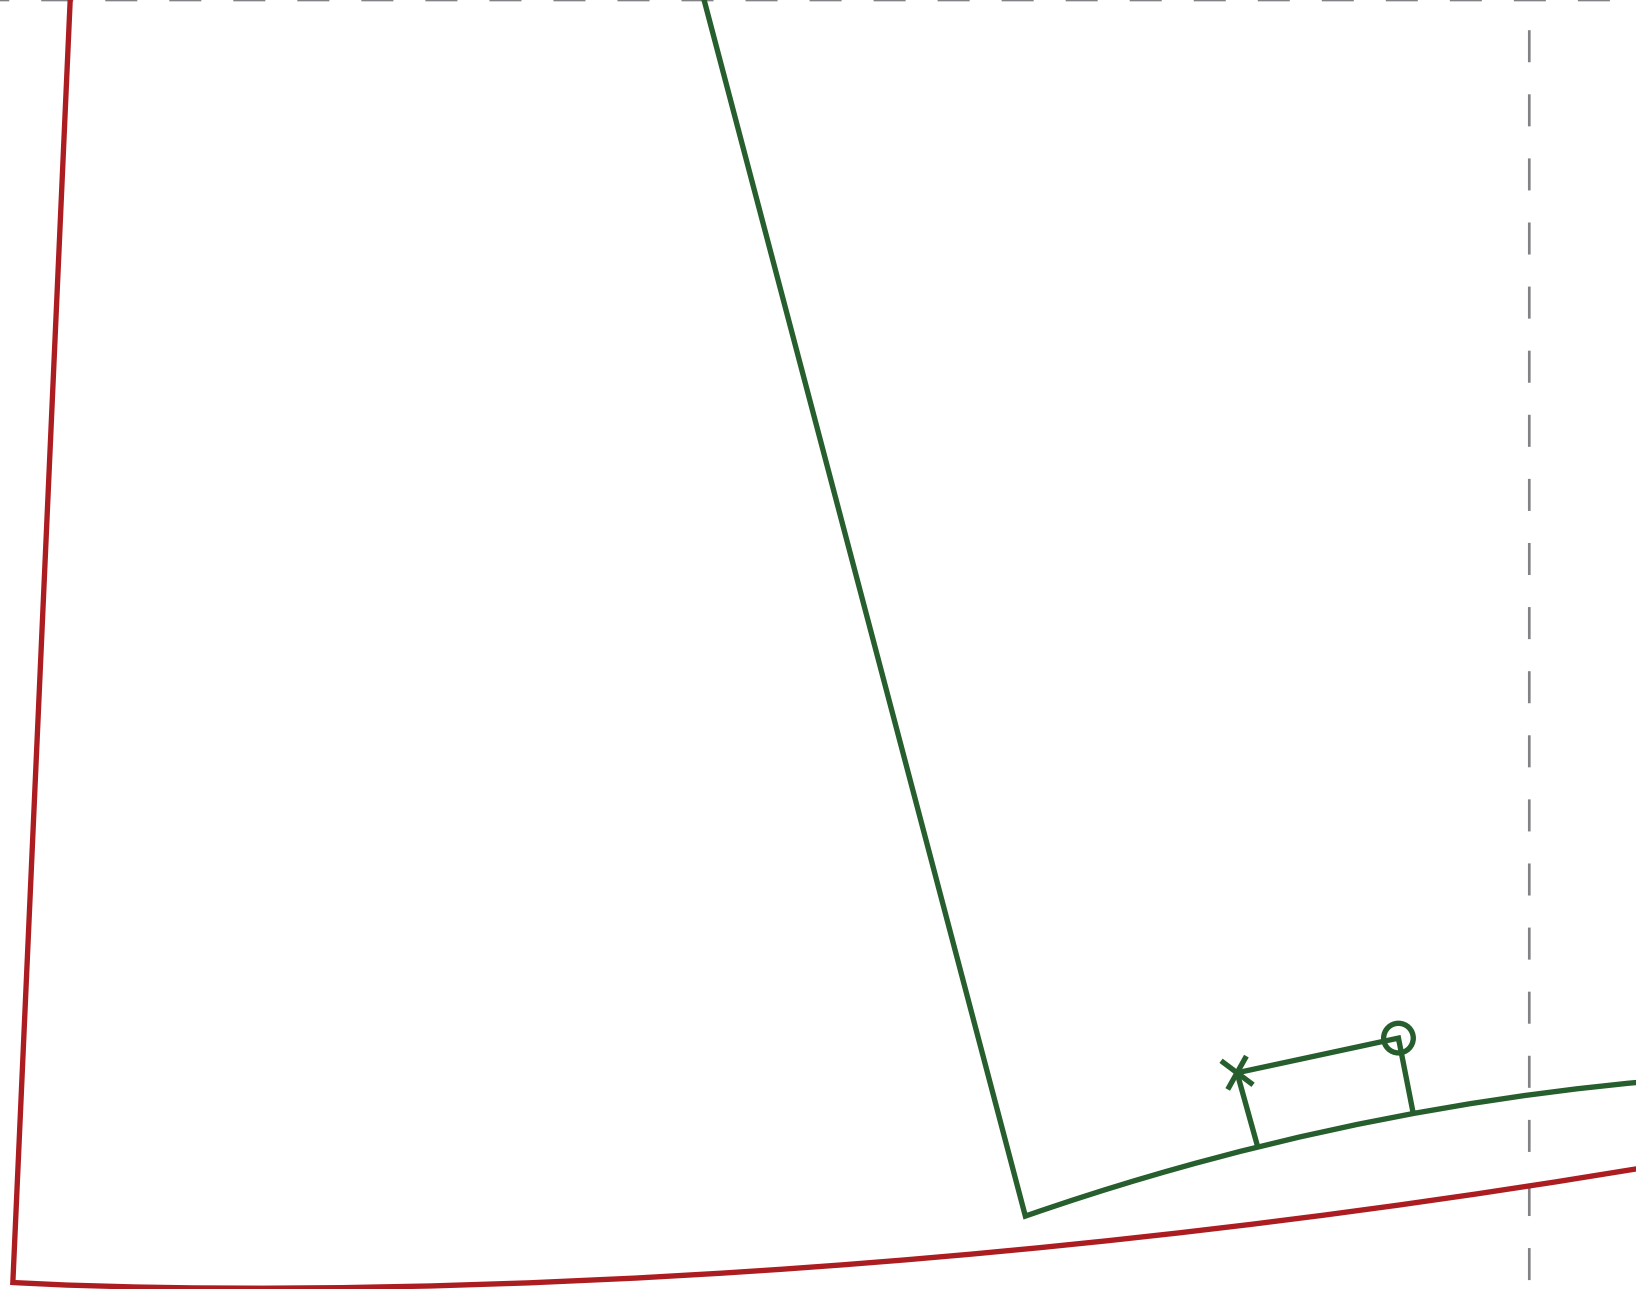

5

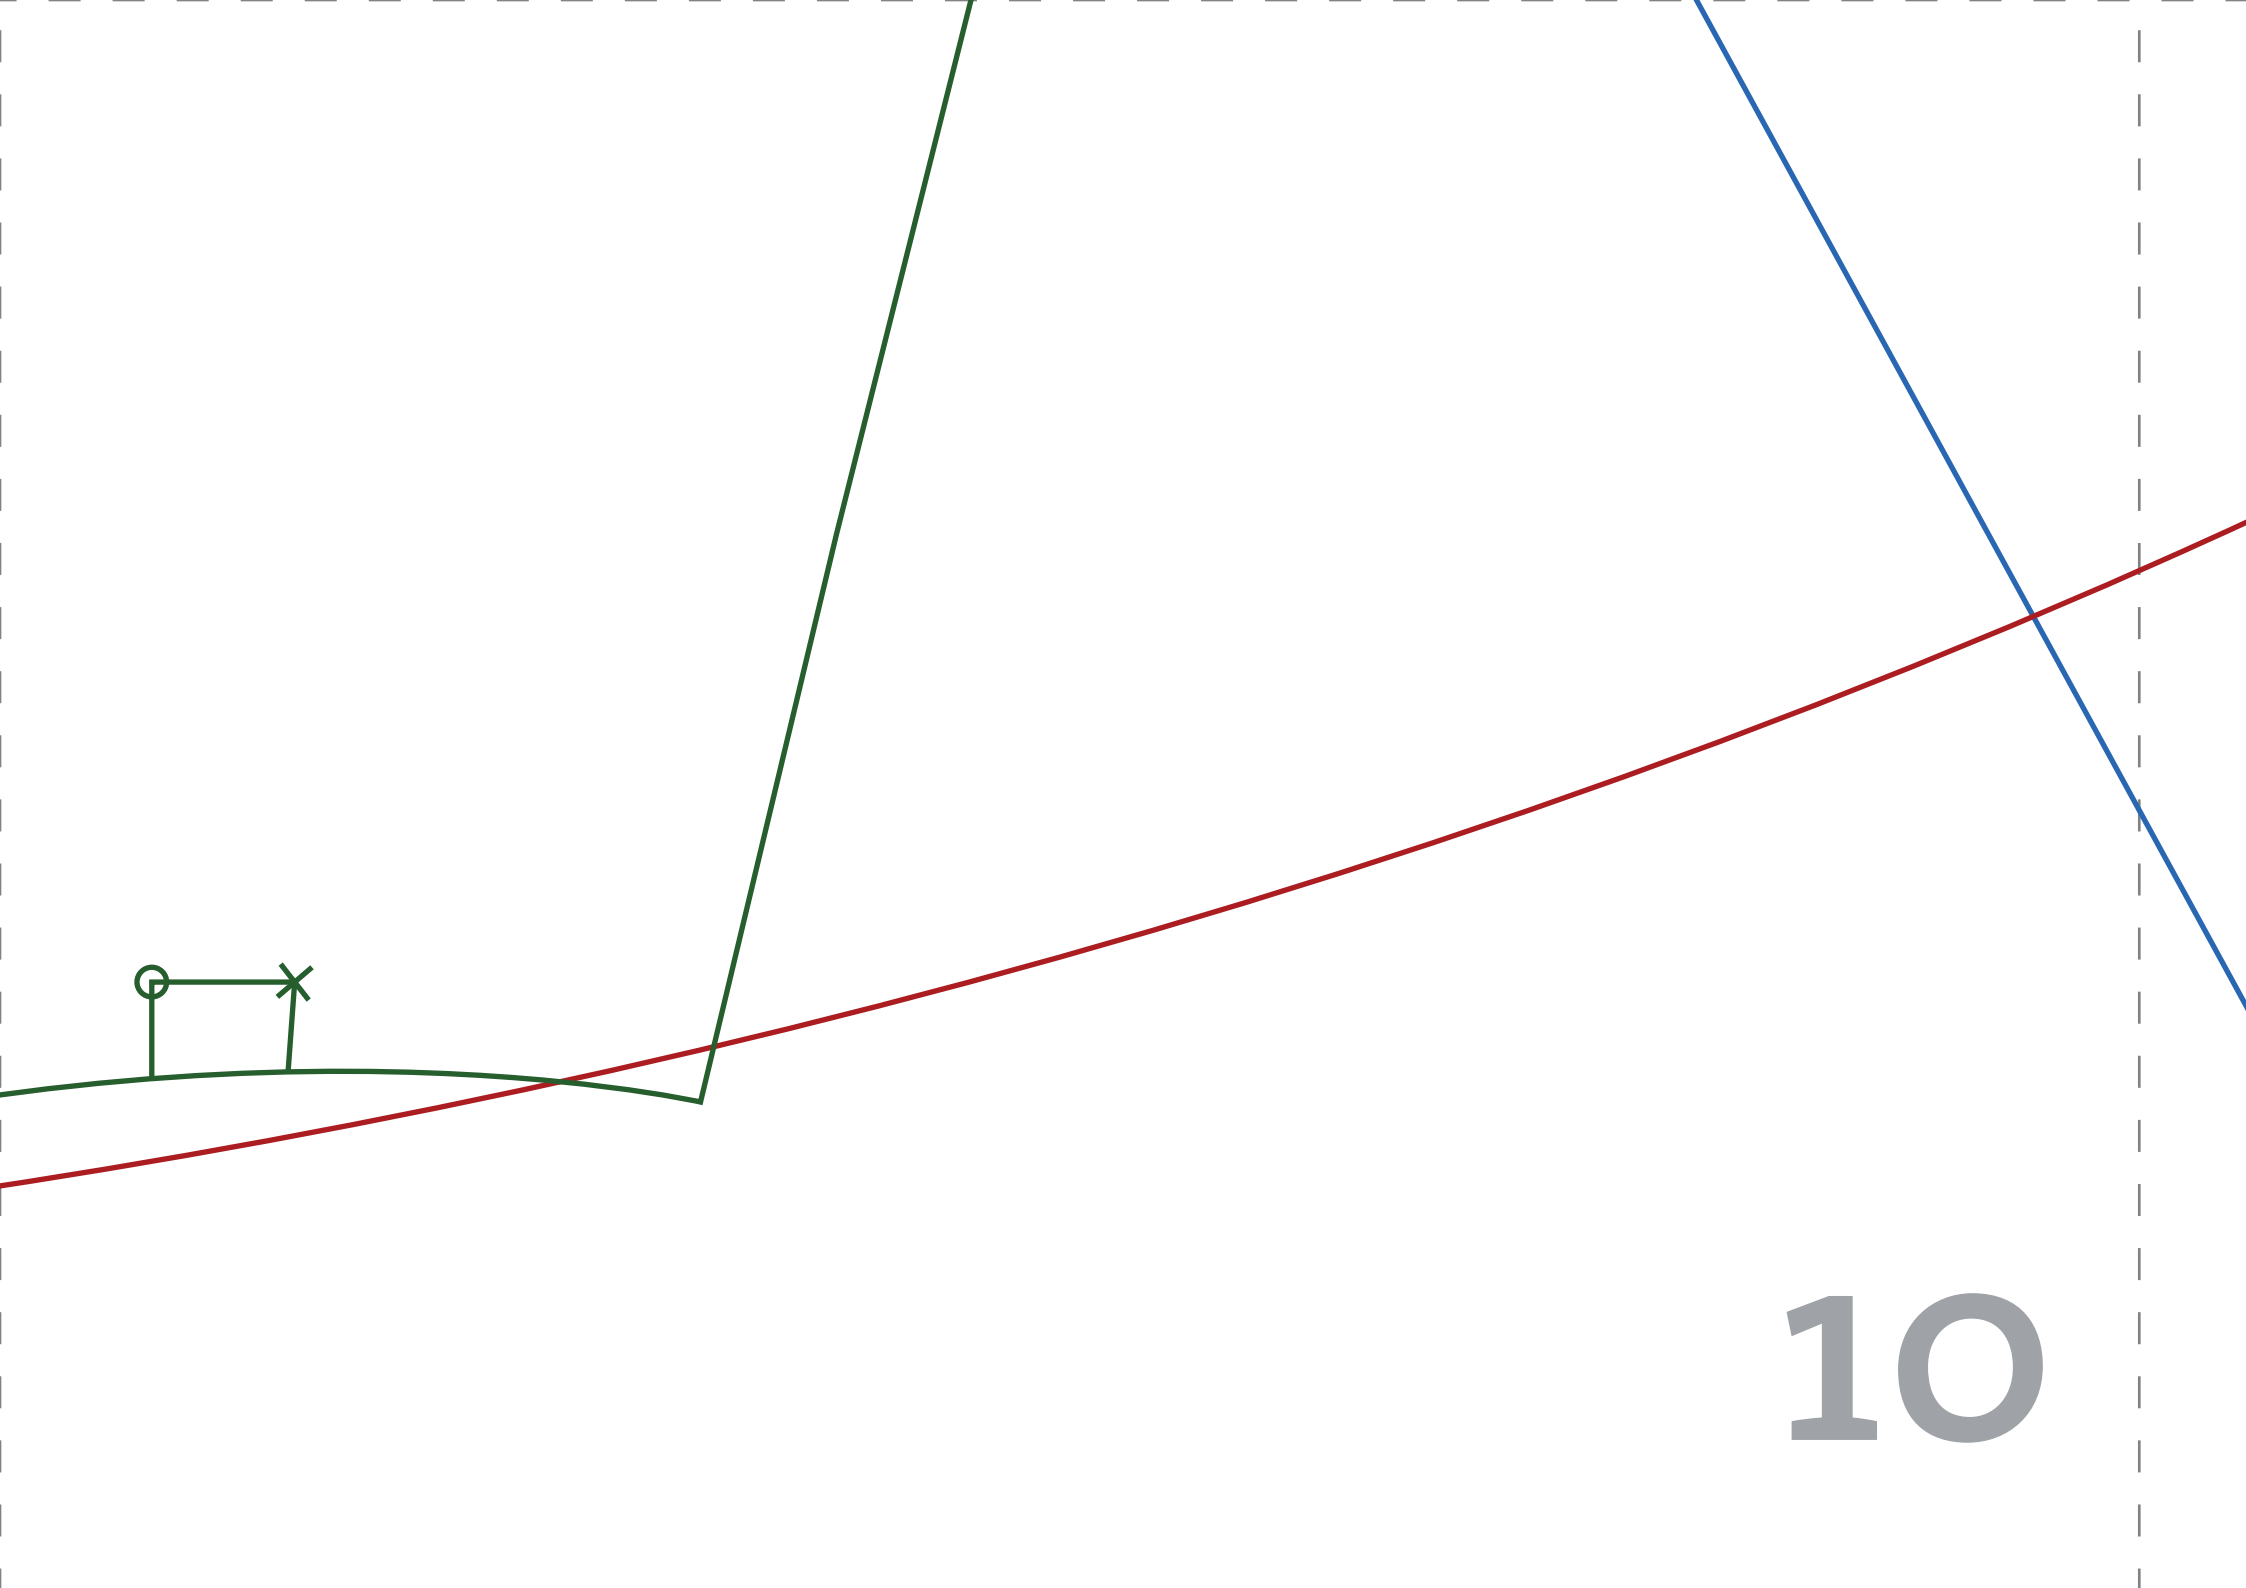

10

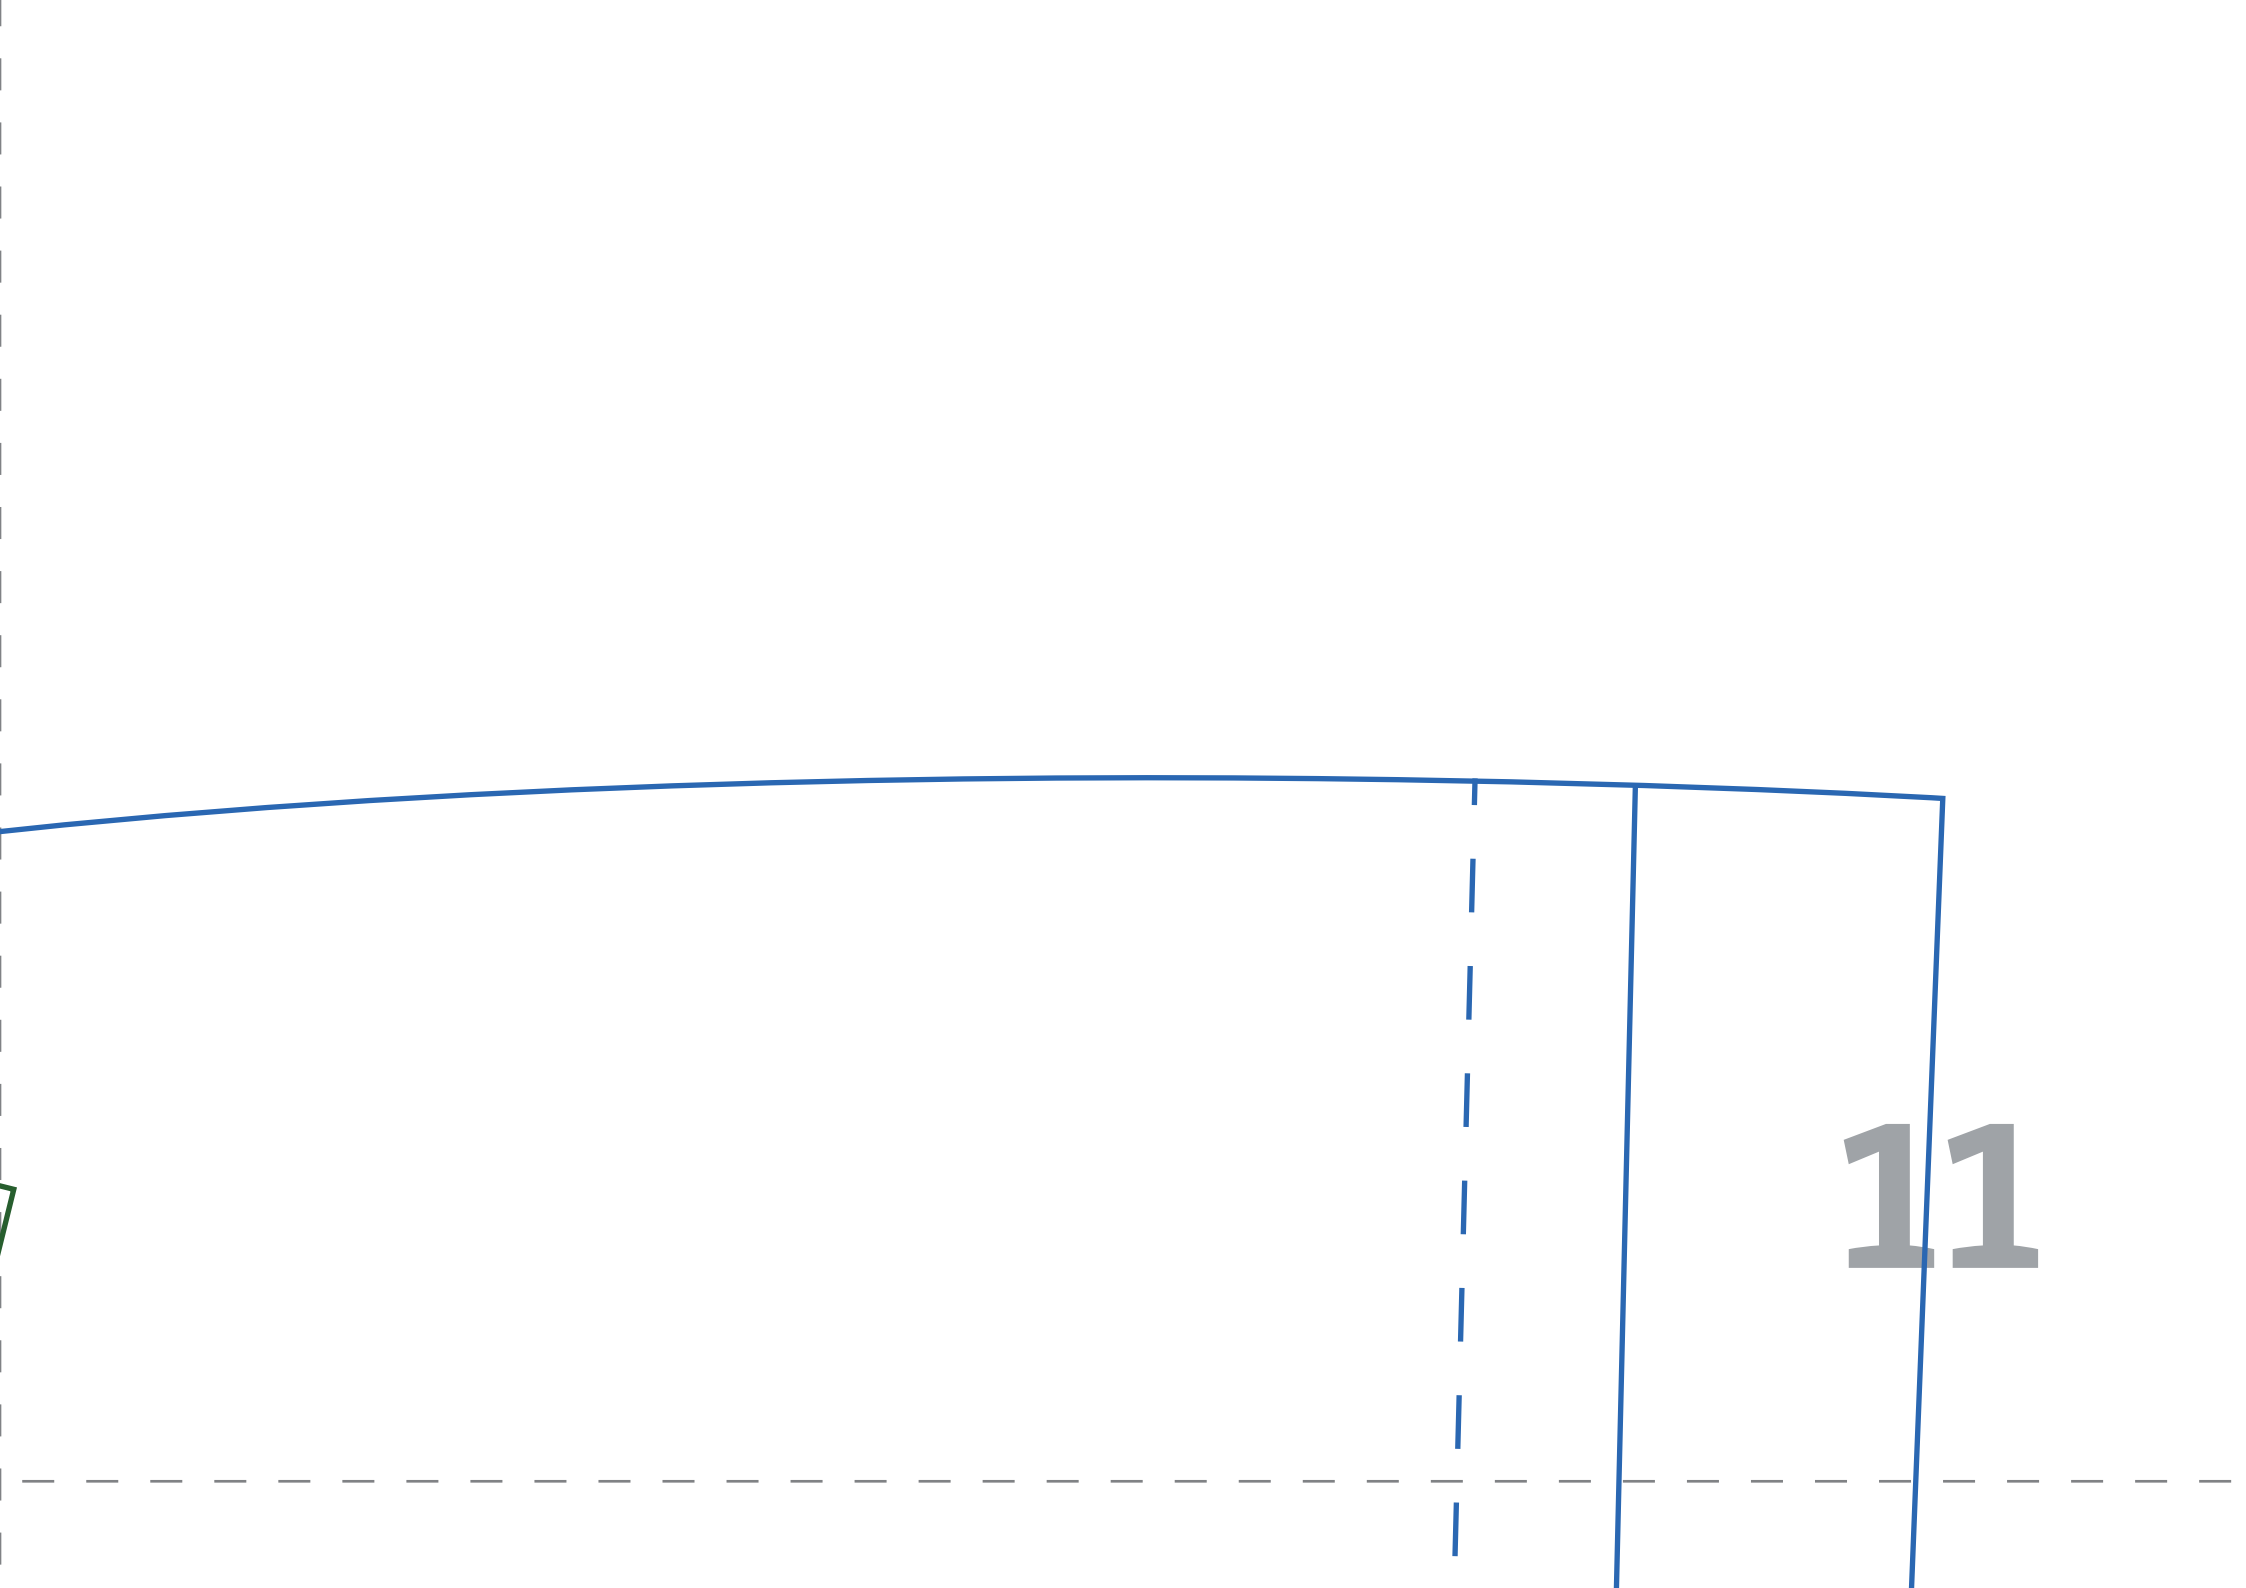


12


Centre front

Front edge


13

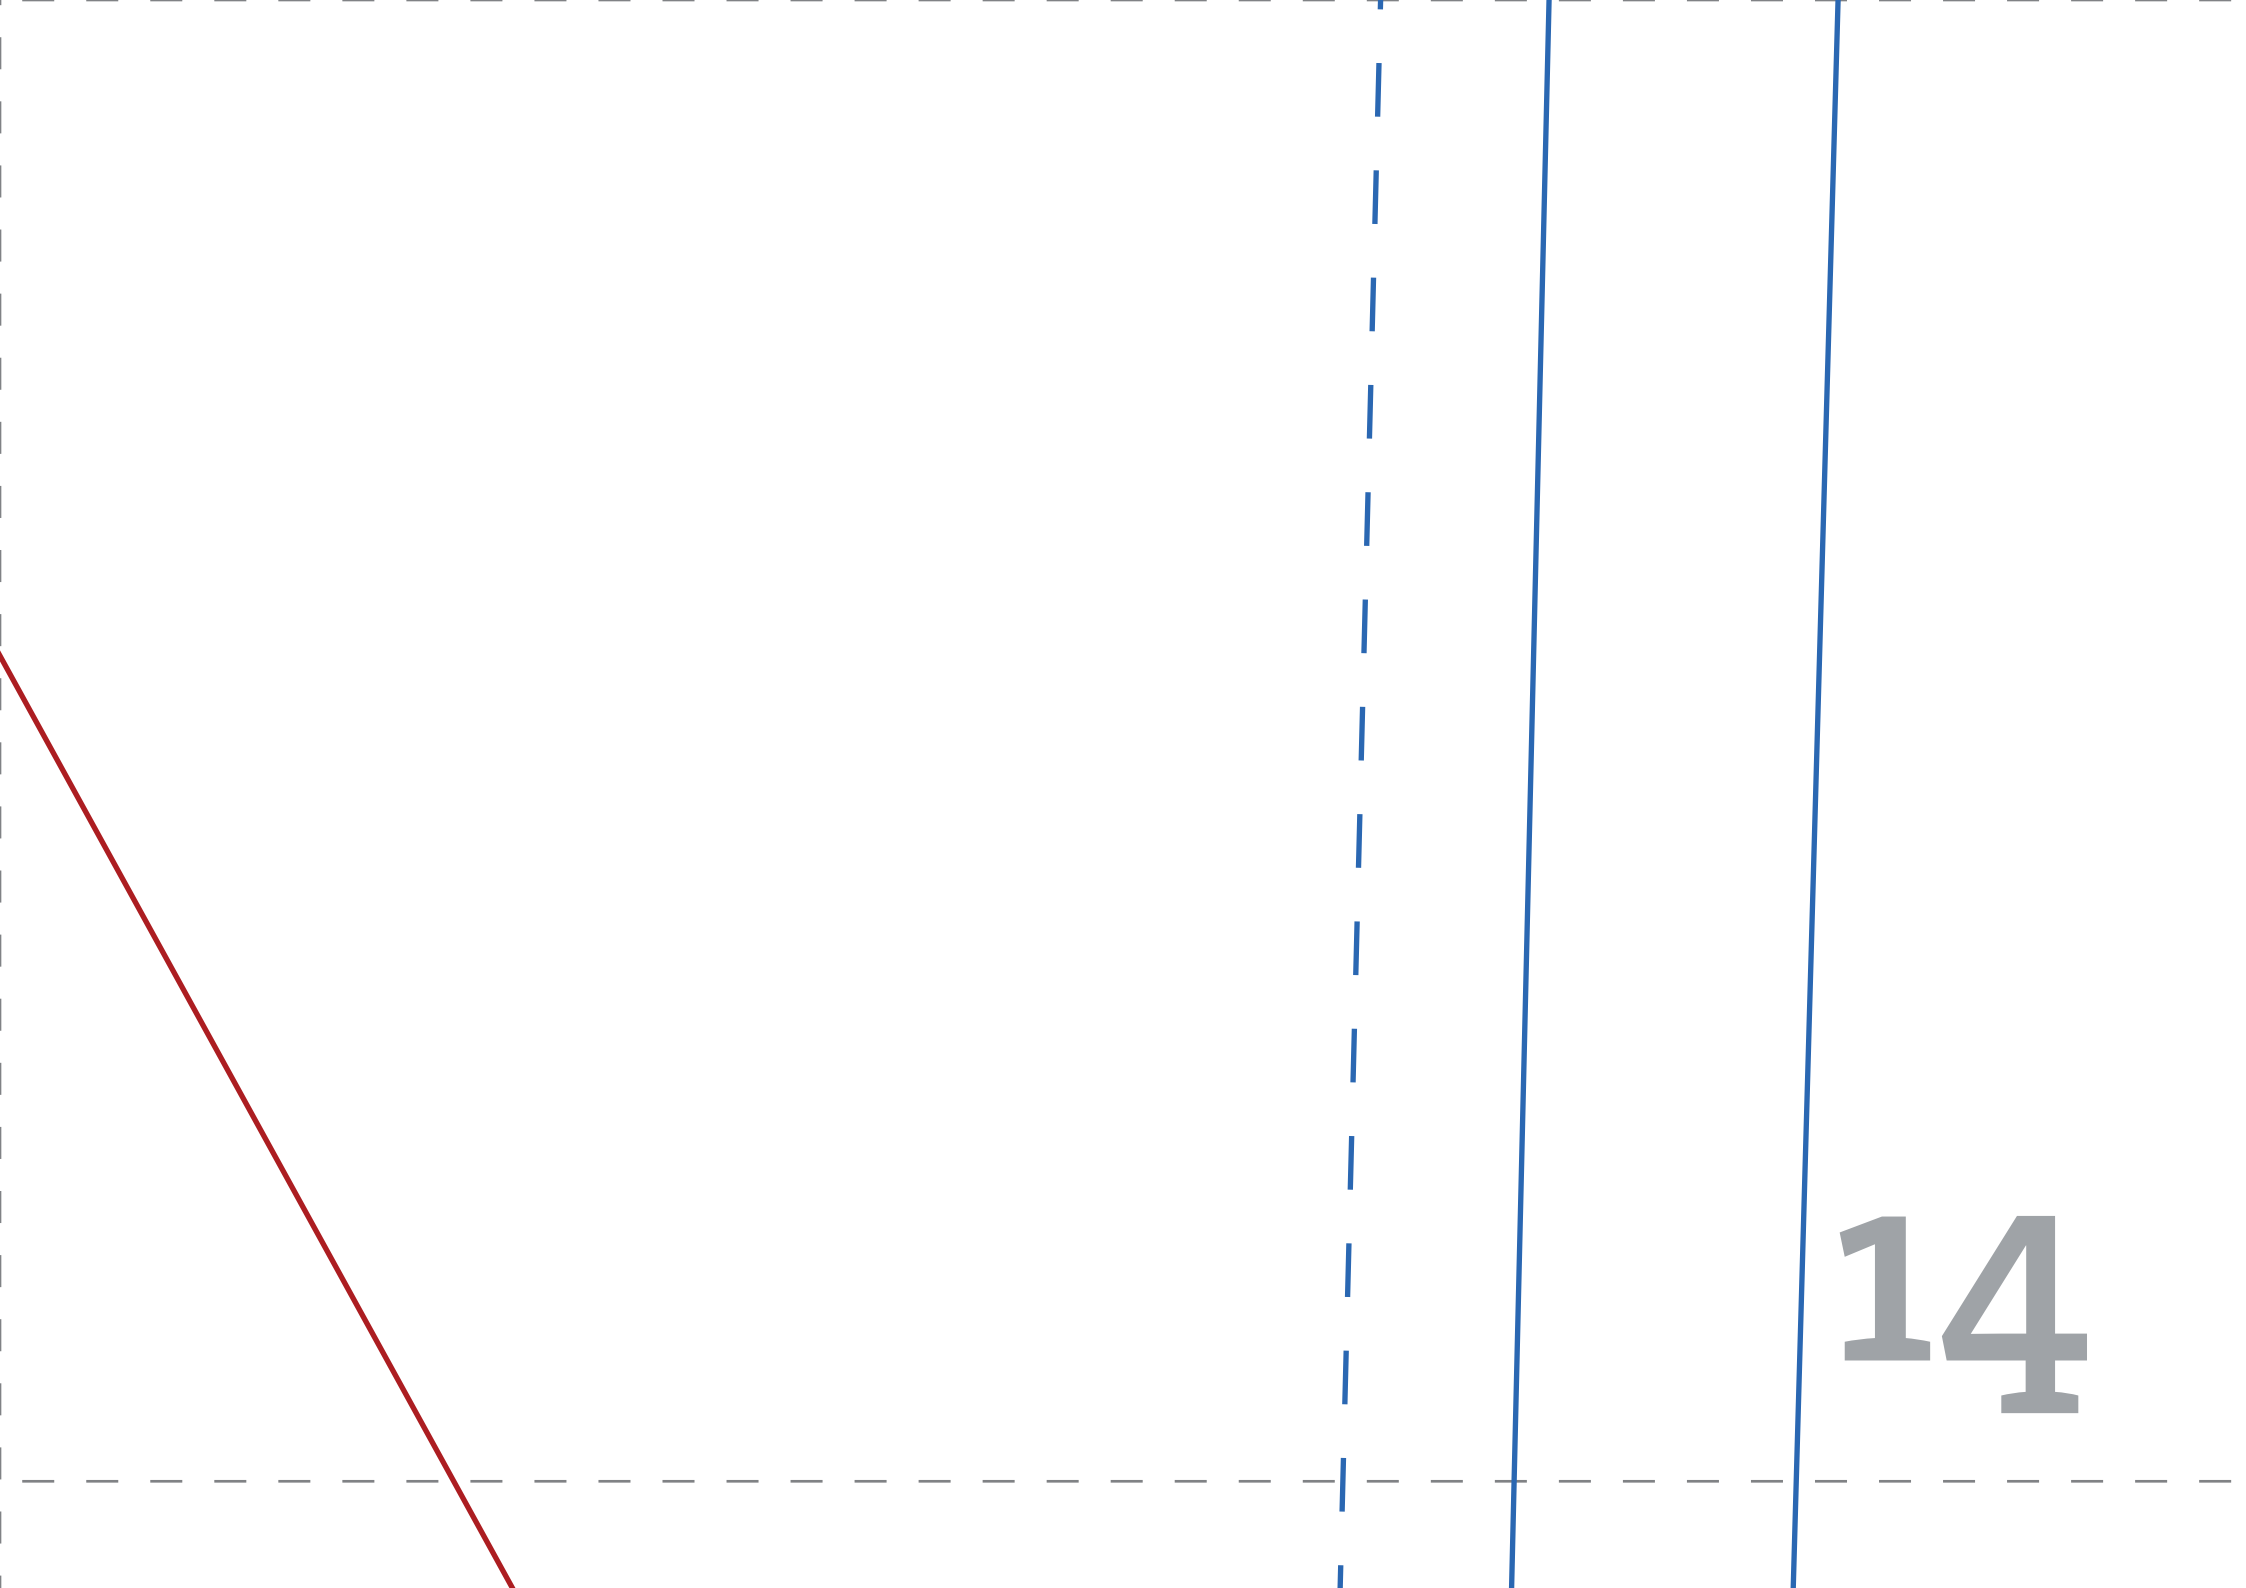

14

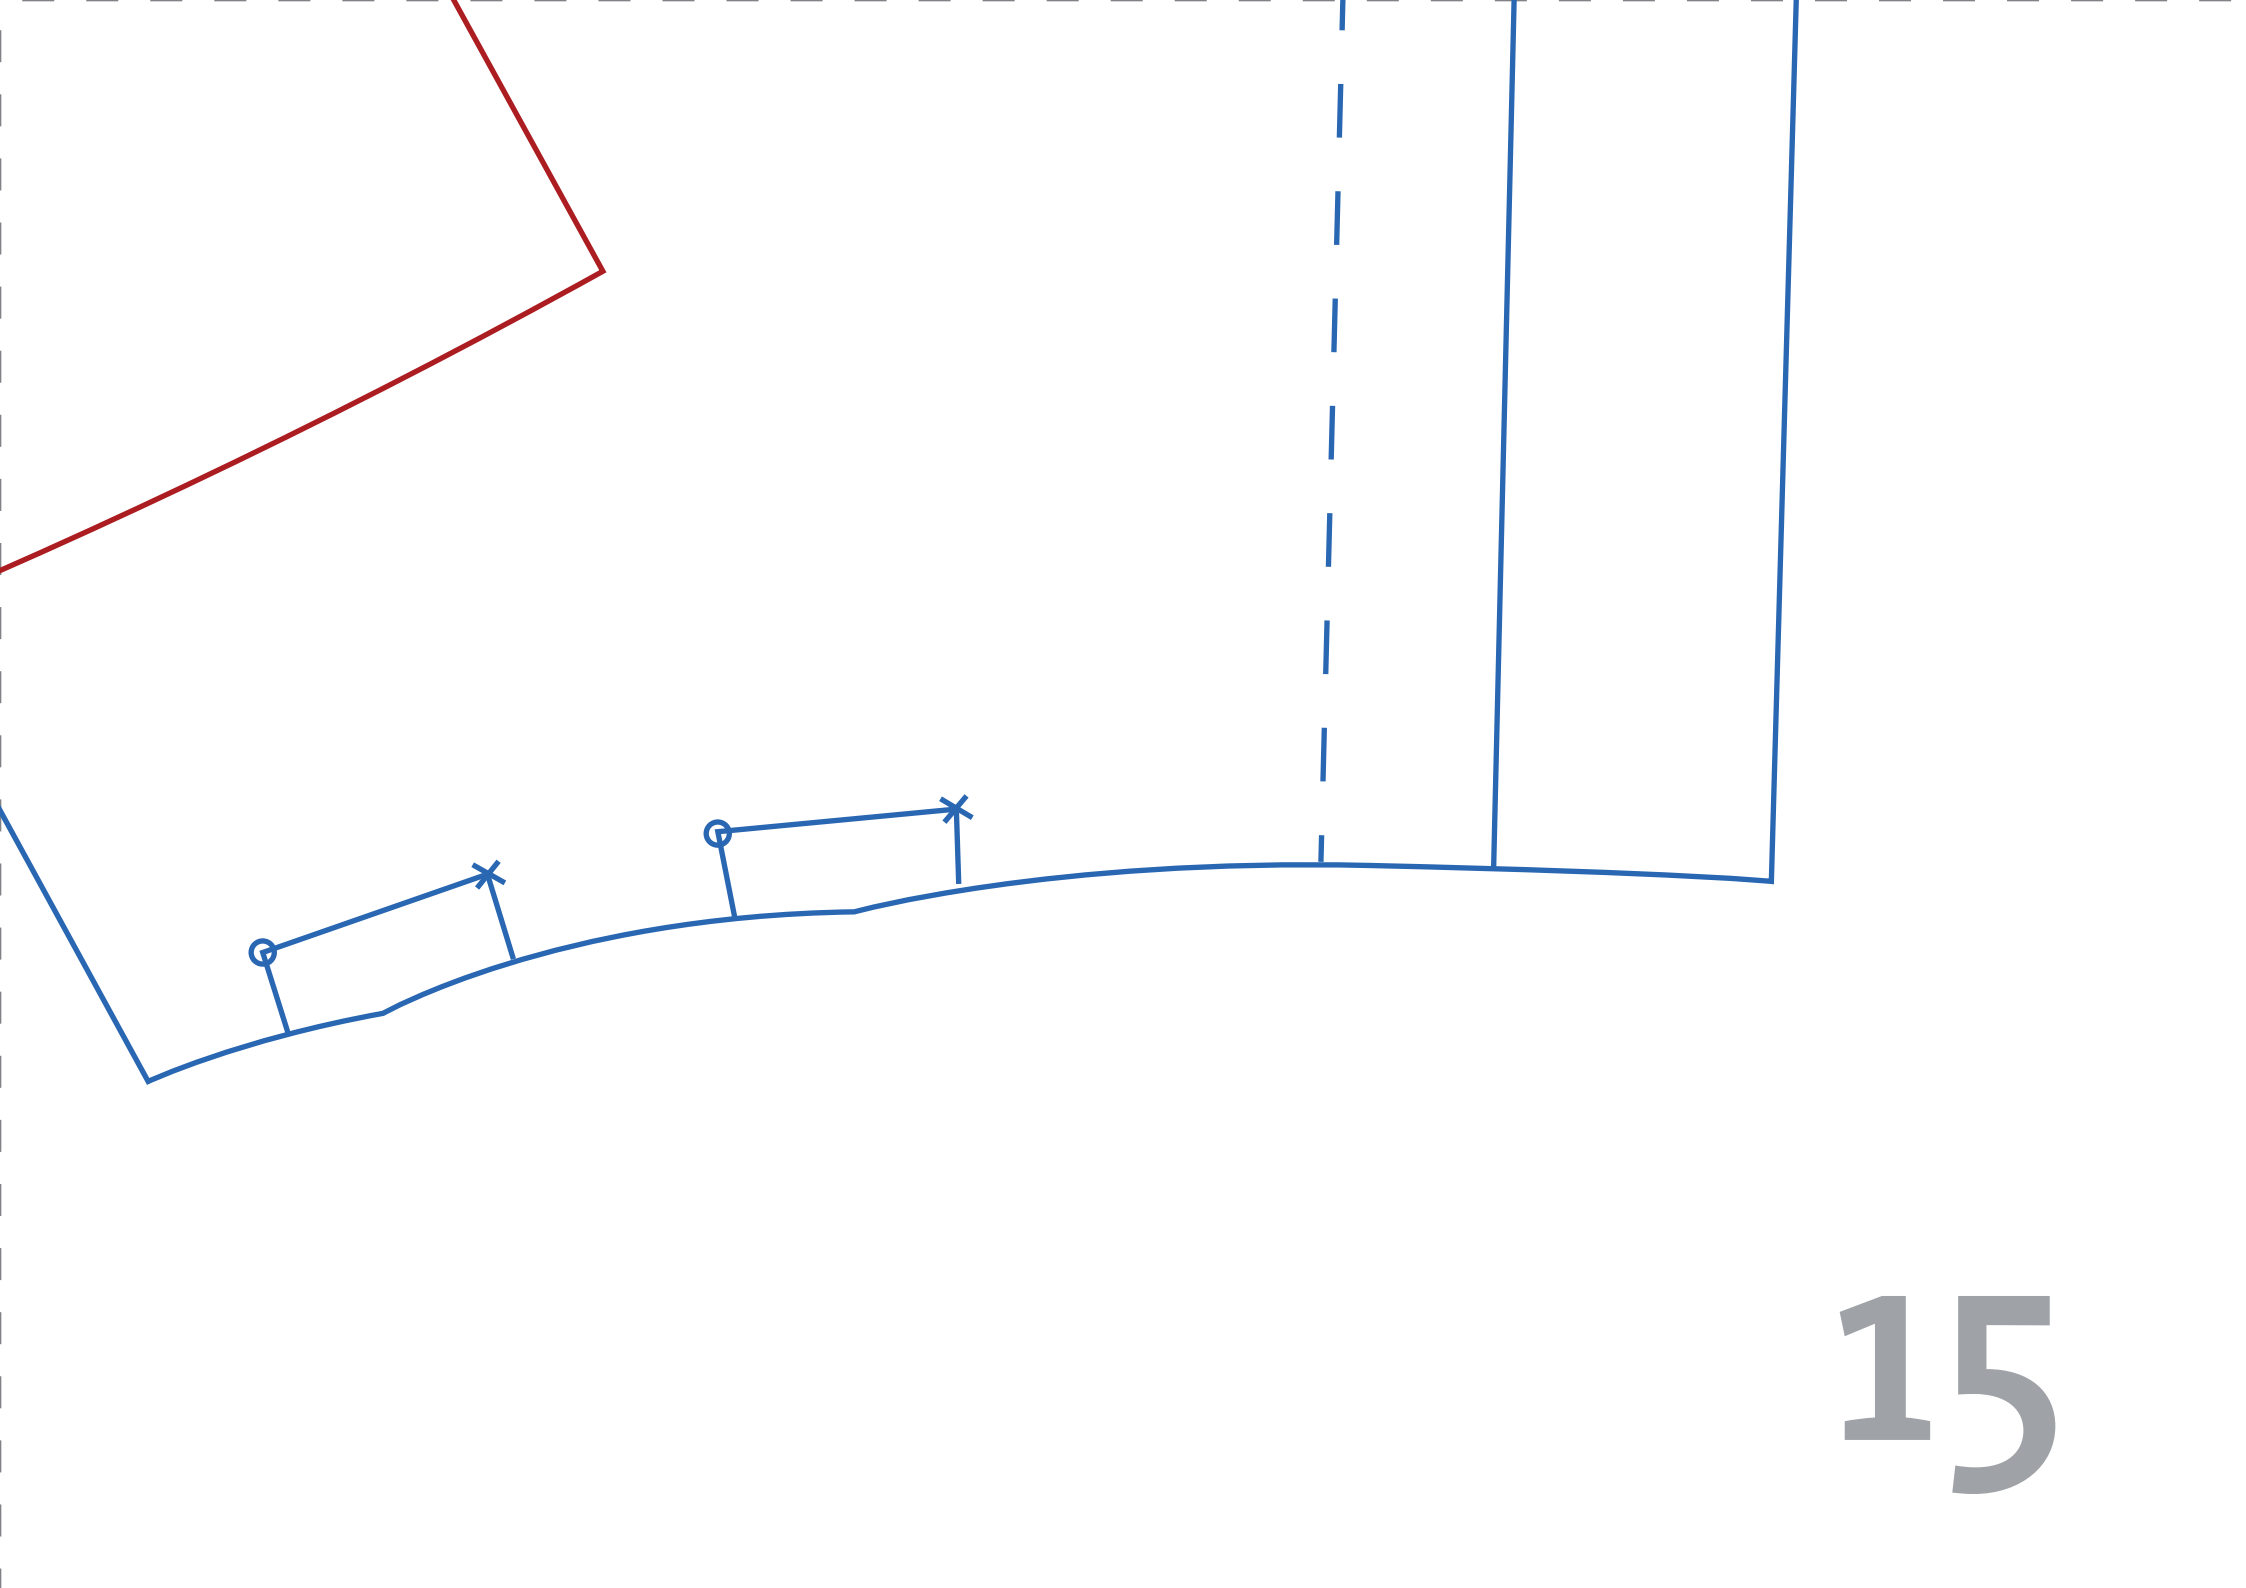

15

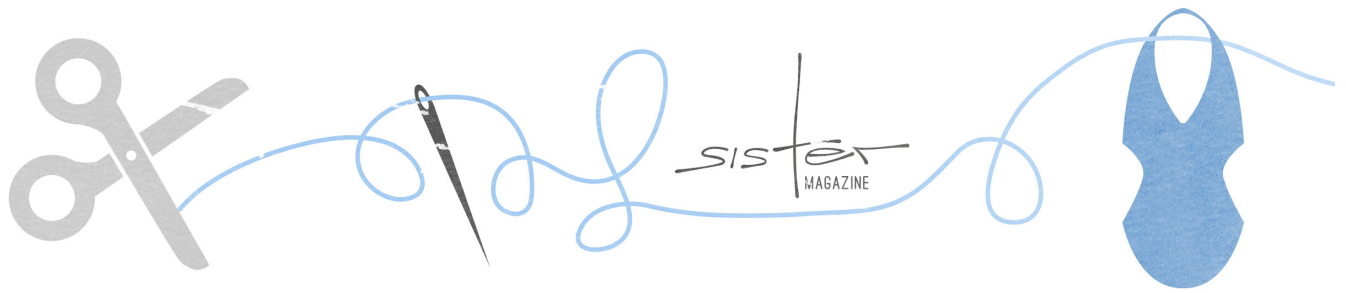

TUTORIAL

TITLE

Green and white striped two-piece beach suit

FROM THE FEATURE

Follow us to the sea - beach outfits

SISTERMAG

N°8

MATERIALS


- » 65 cm of fabric
- » Zipper, 18 cm long
- » Elastic band (50 cm, 0.5 cm)

TUTORIAL



1. String the outer edges of the front and back parts of the pants and stitch to the side parts, sew
2. Sew inner pant seam, sew zipper into the left side. Close side pant seams.
3. Sew diagonal stripes to lower pant edges, iron inside and stitch. Strengthen waist edge on the left side with iron-on interfacing, sew on diagonal stripes with right sides together, iron inside and stitch.
4. Sew together the centre and side parts of the bustier
5. Sew straps about 60 cm long and 1 cm wide (finished width), the final length will be determined during fitting
6. Sew lower bustier parts to upper once, iron it along the seam
7. Turn the mid back part over with thin fabric and stitch casing for elastic band at regular intervals
8. Pull in elastic bands
9. Stitch side backs parts
10. Close side seams
11. Sew straps to front part, determine final length by fitting and sew on side back parts
12. Trim upper and lower edges with diagonal stripes
13. Work buttonholes and sew on buttons





OVERVIEW PATTERN

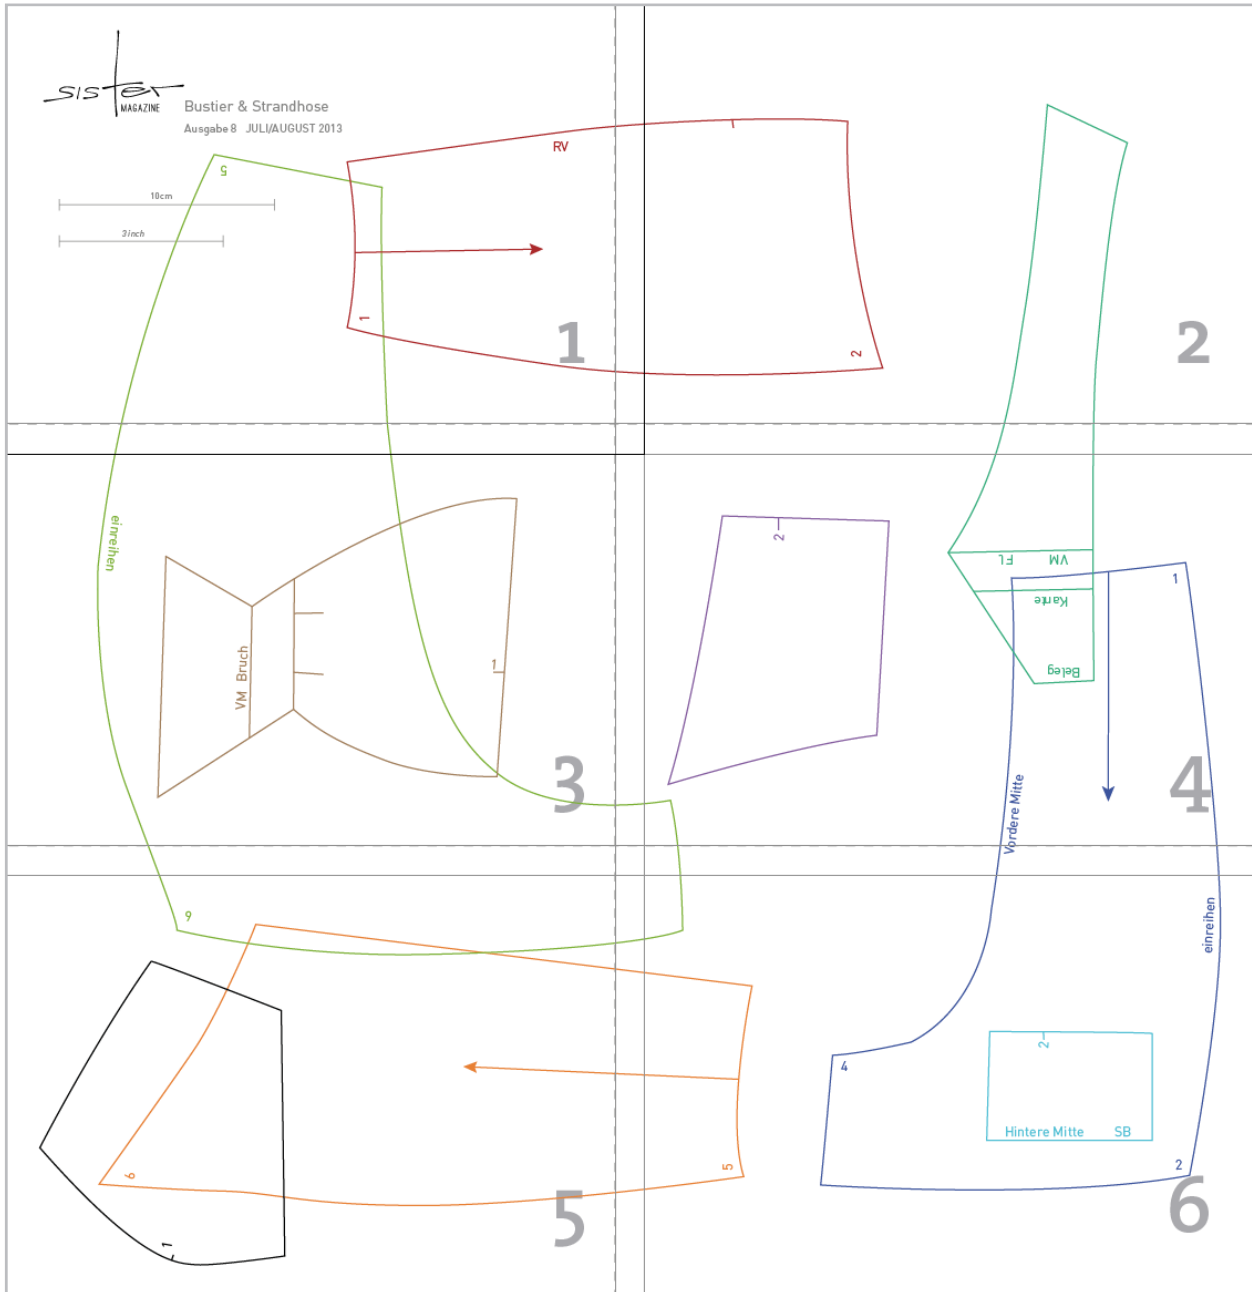


- | | |
|--|------------------------------|
| Centre front bustier part (2x) | Side front pants part (2x) |
| Centre back bustier part (1x with fabric fold) | Centre back pants part (2x) |
| Bottom front bustier part (2x) | Side back pants part (2x) |
| Side back bustier part (2x) | Centre front pants part (2x) |
| Side bustier part (2x) | |

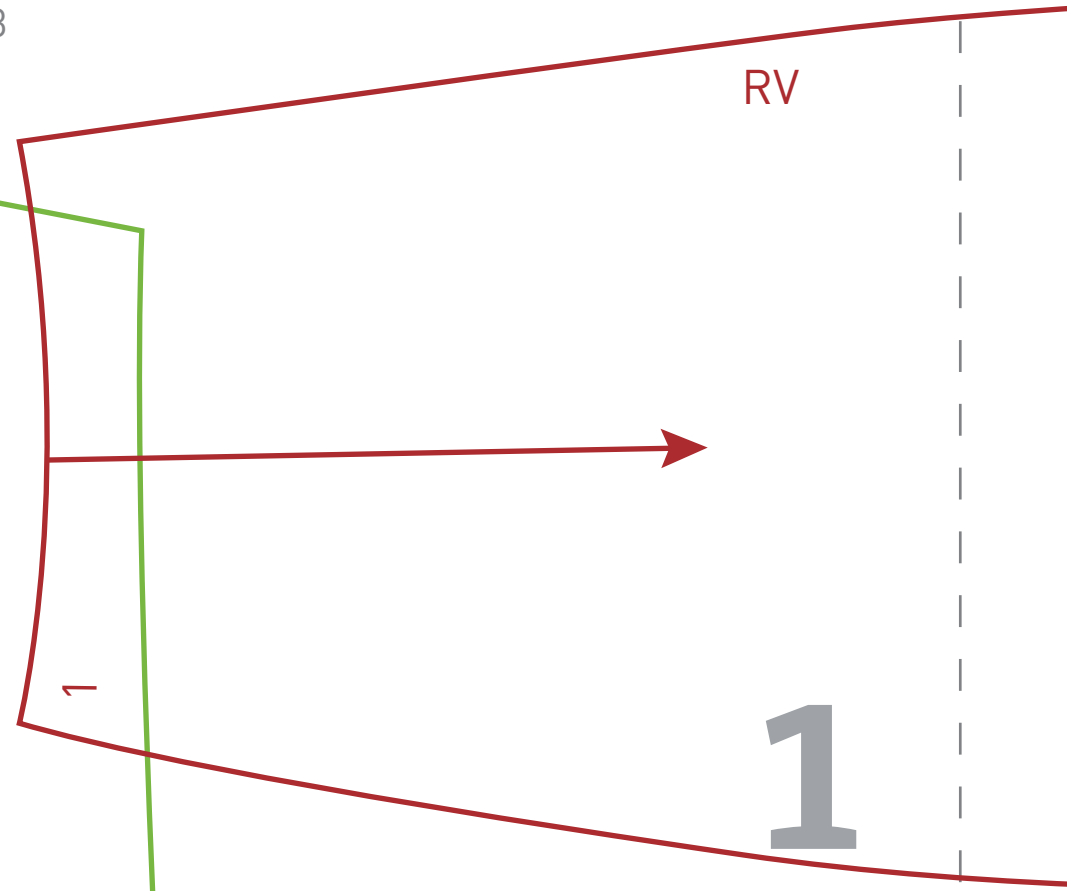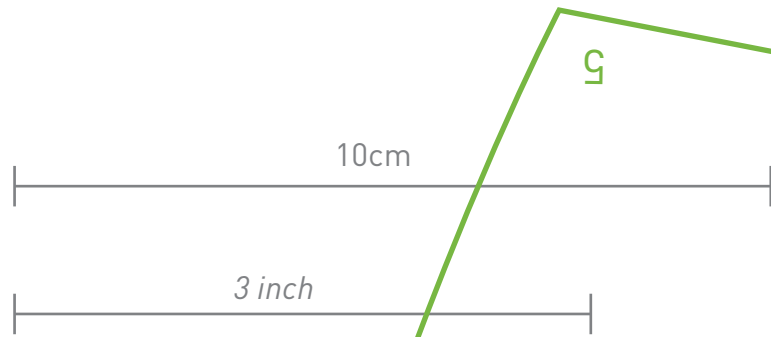

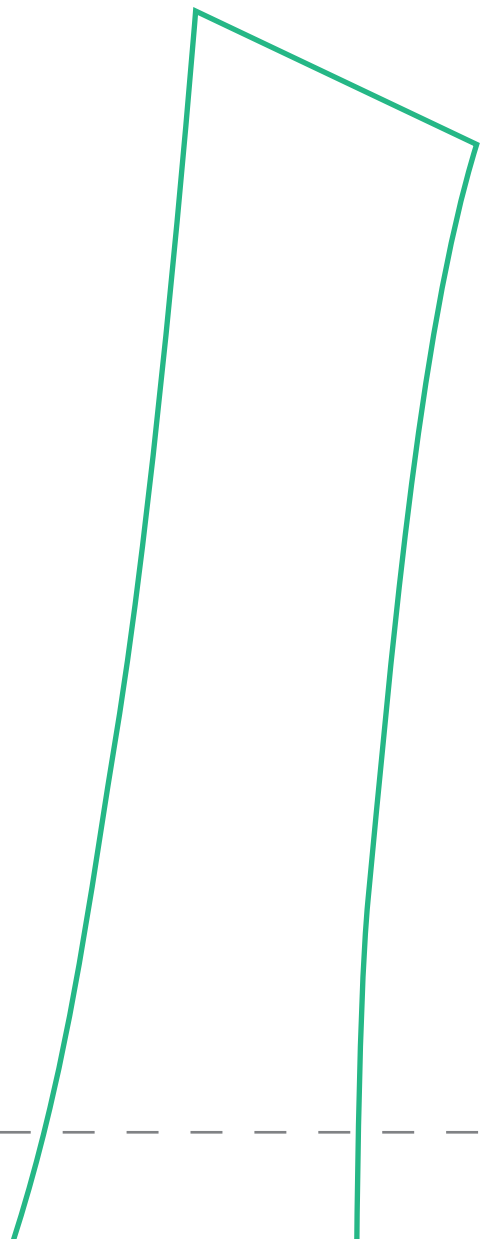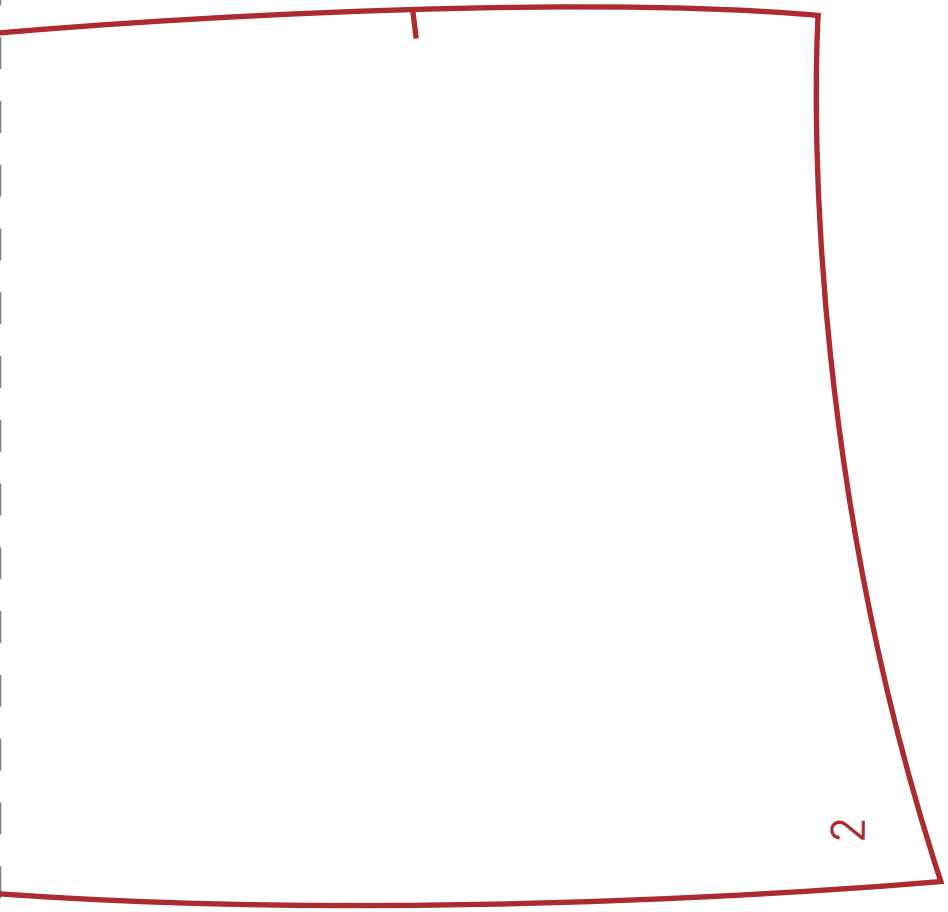

2




string

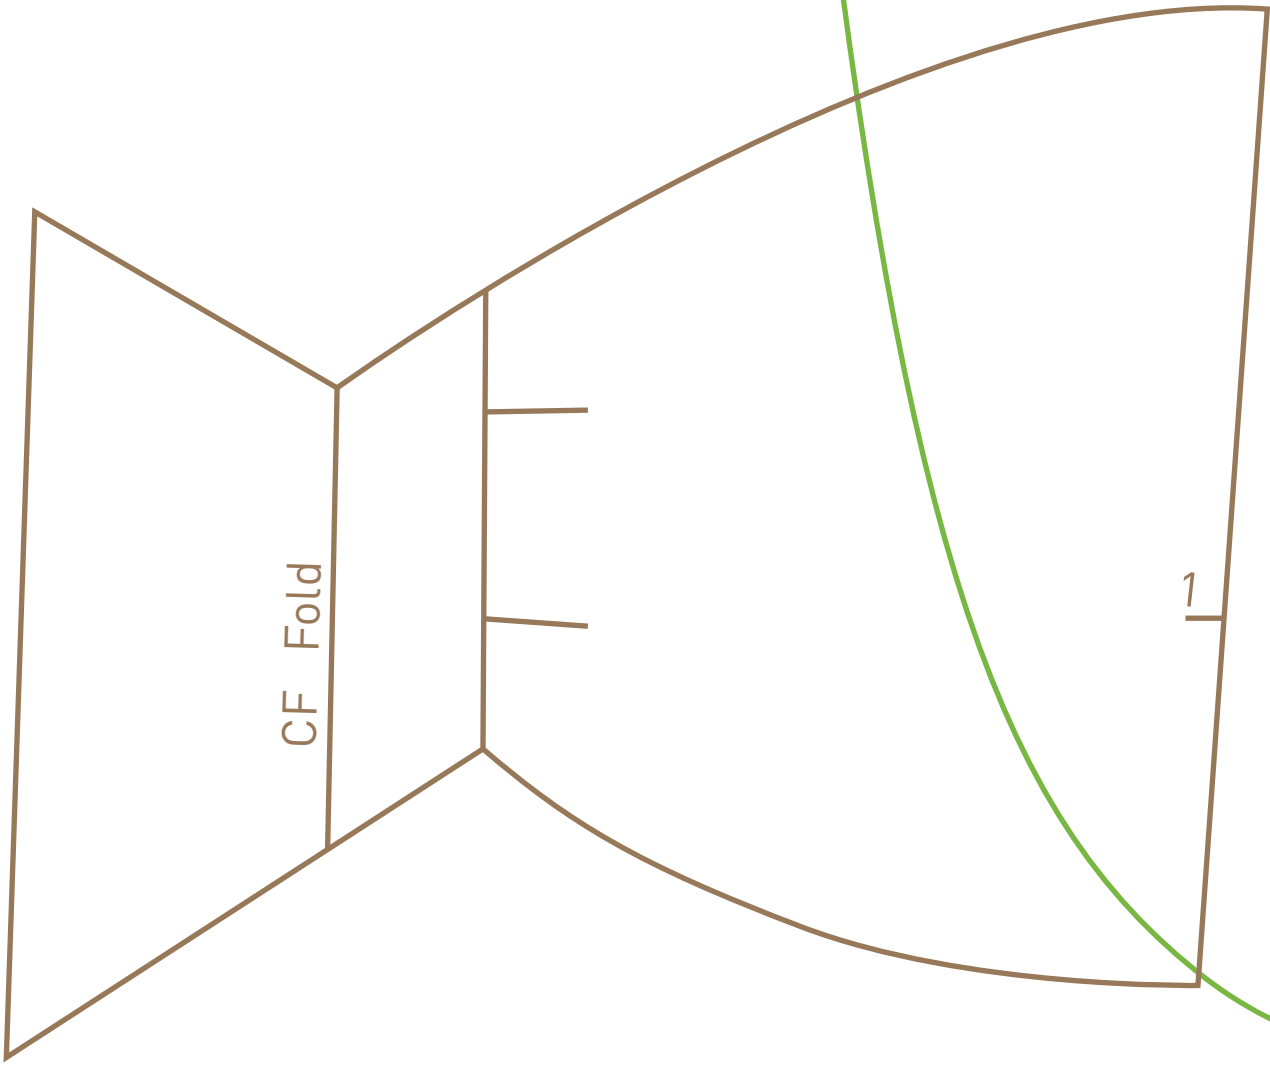


CF Fold

1

3

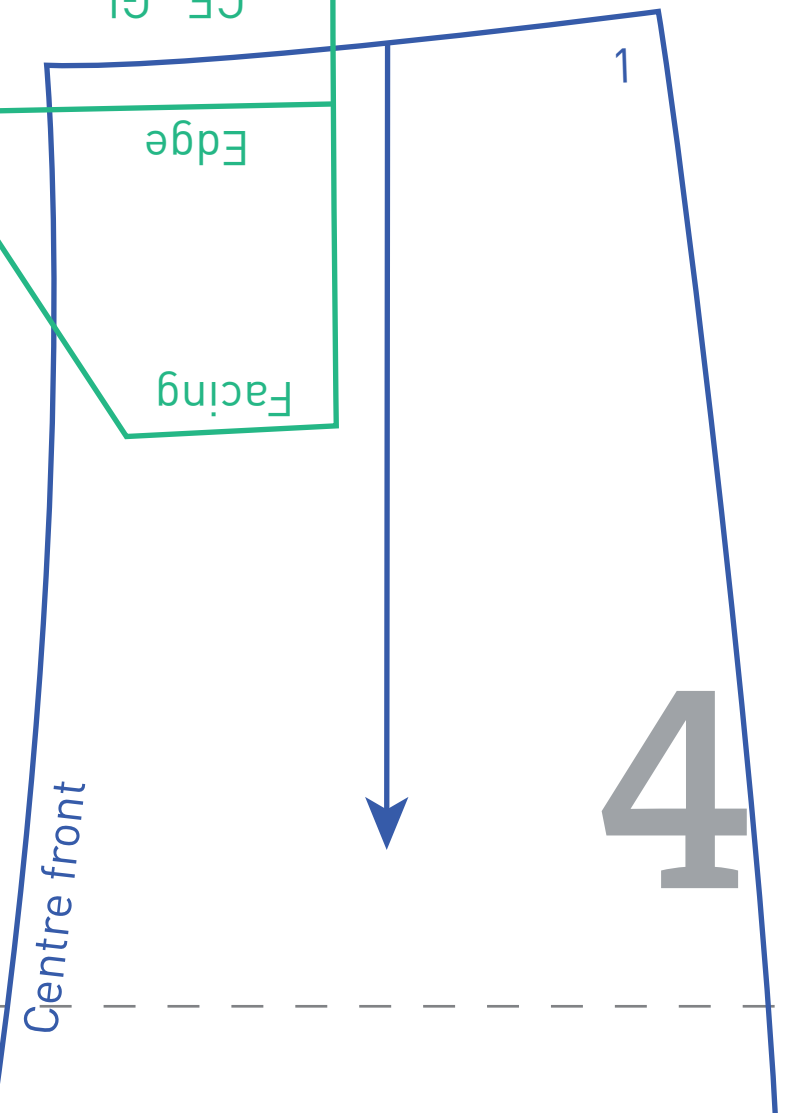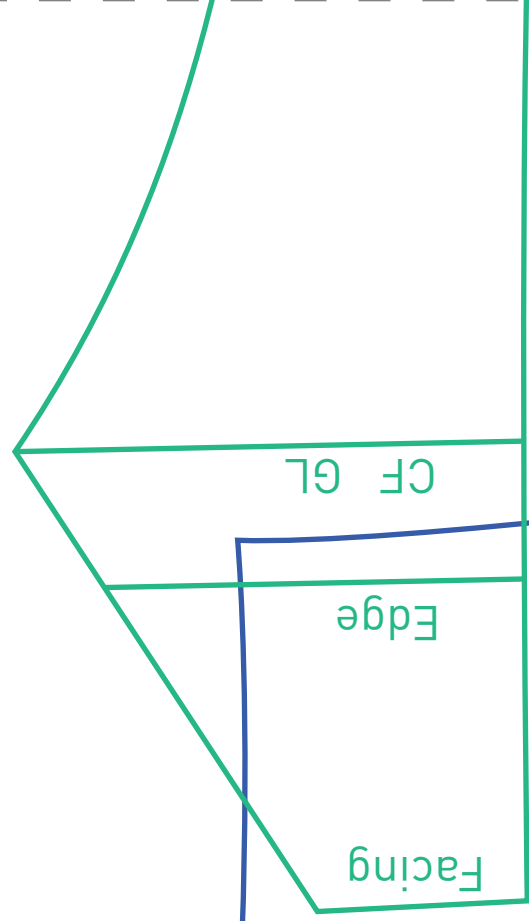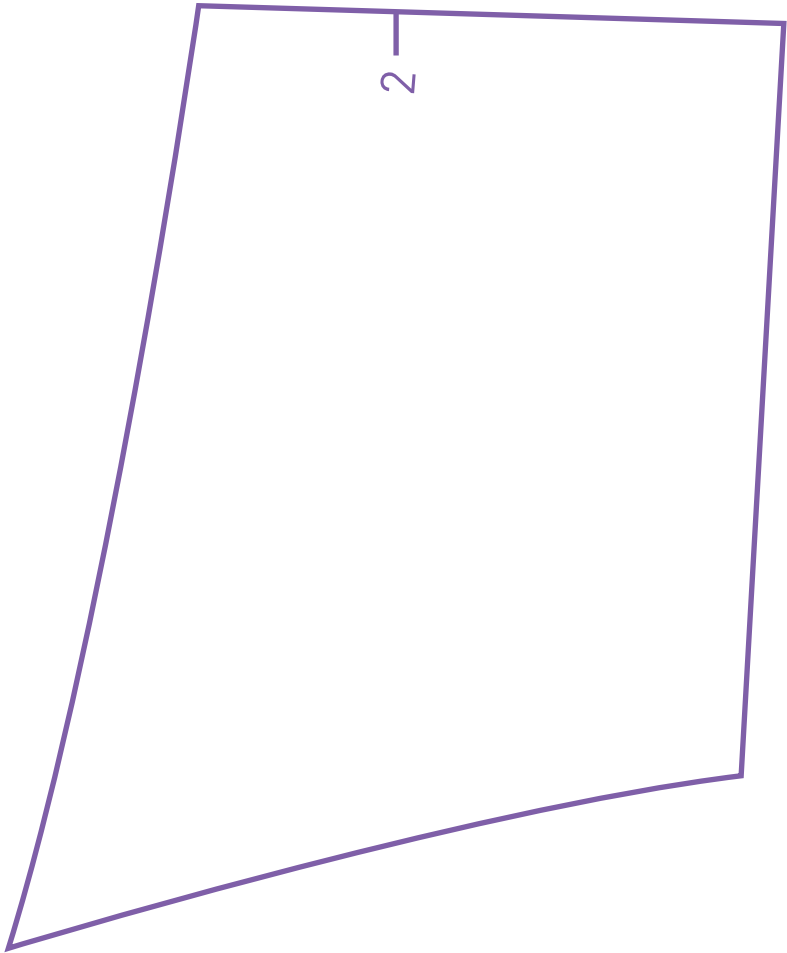

4

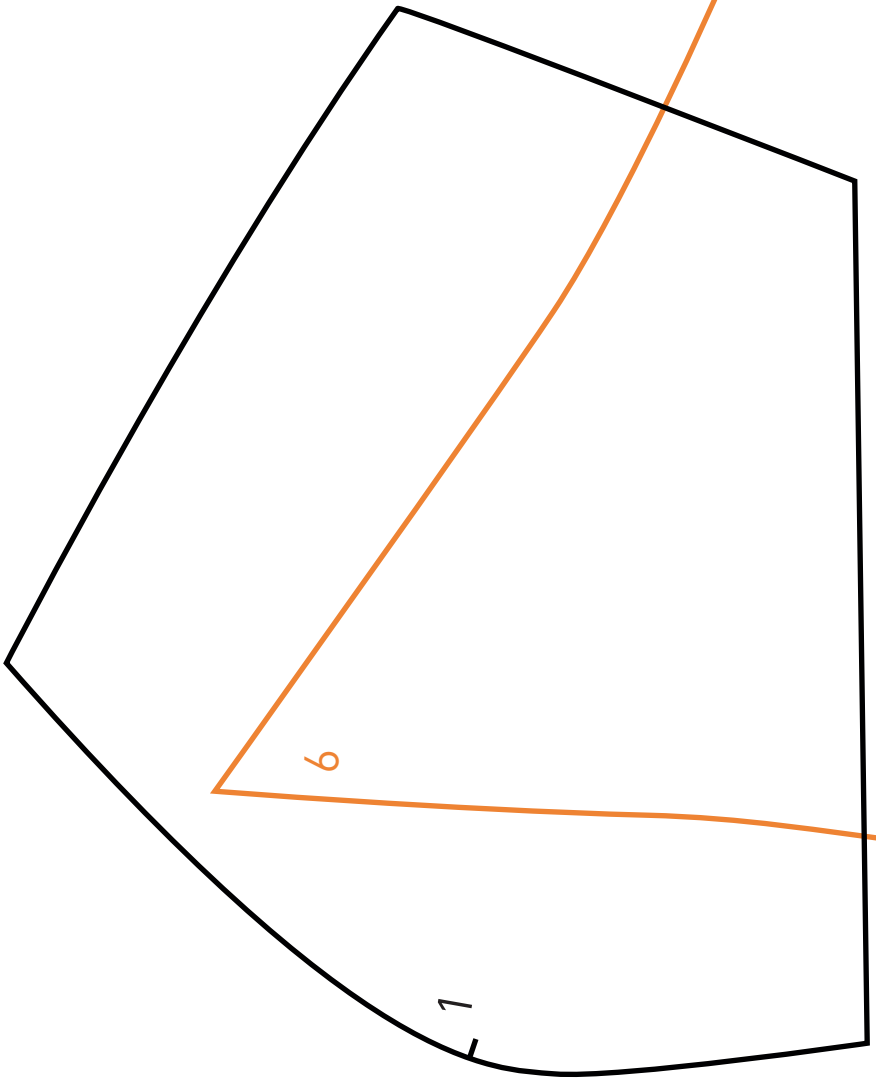

9



6

1



5



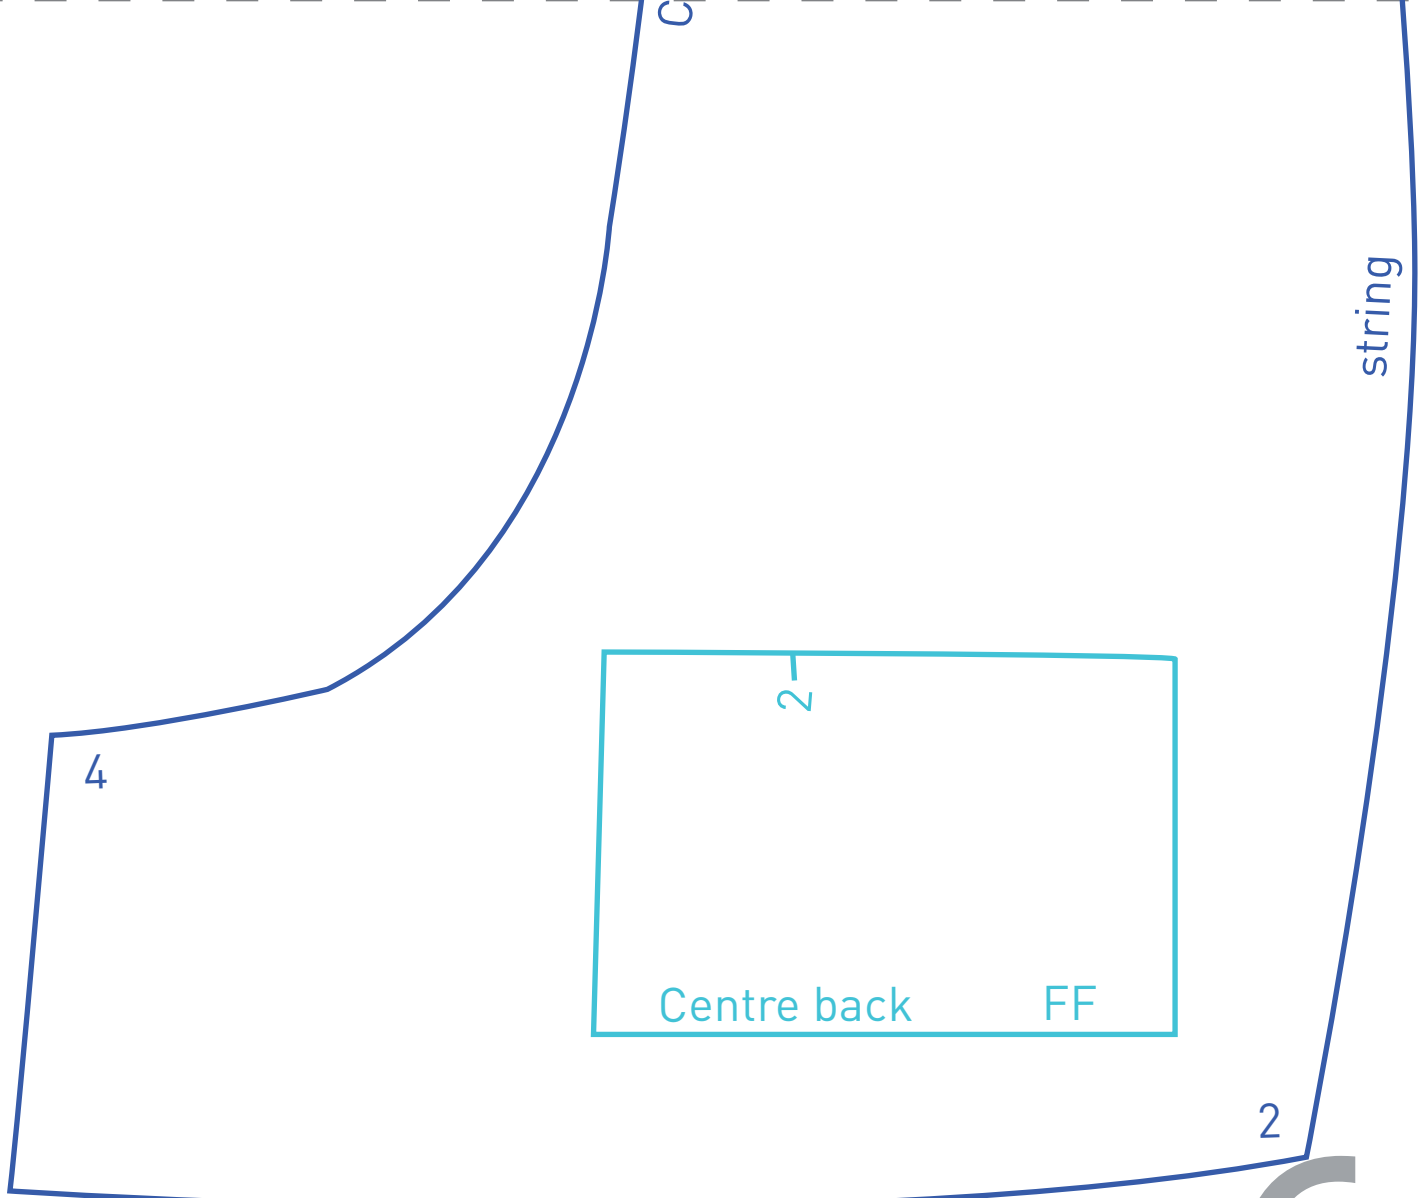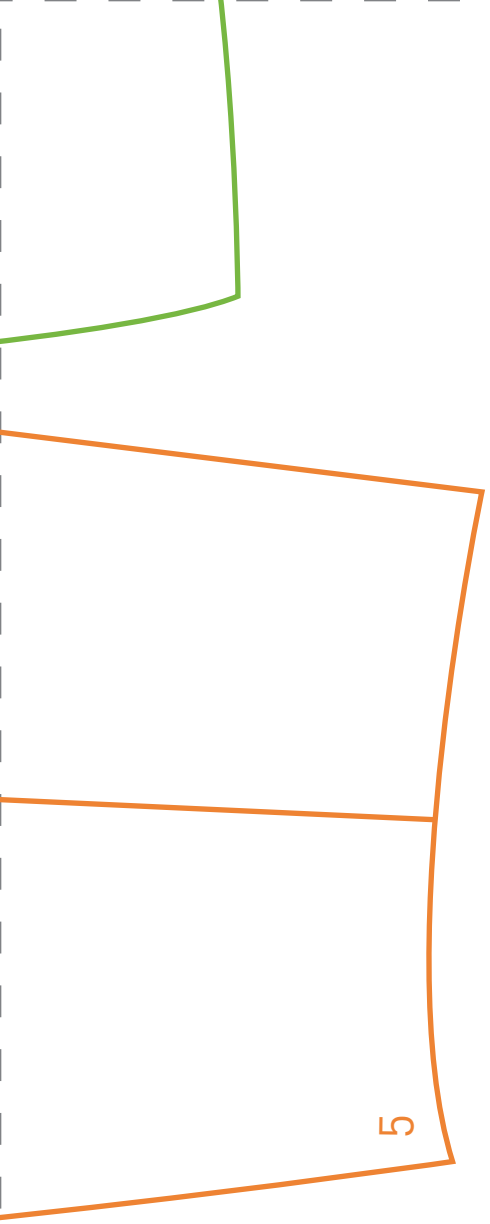

6